

LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT

200 S. E. Ave C, Seminole, TX 79360 * 432-758-1127

October 8, 2020

Jeff Walker
Executive Administrator
Texas Water Development Board
P.O. Box 13231
Austin, TX 78711-3231

Jeff,

Llano Estacado Underground Water Conservation District adopted the Groundwater Management Plan for 2020-2025, at a public hearing. On Thursday, October 8, 2020 at a regular business meeting.

Regards,



Lori Barnes
District Manager

LB/mn

Attachments enclosed

**LLANO ESTACADO
UNDERGROUND
WATER CONSERVATION DISTRICT**



“GROUNDWATER MANAGEMENT PLAN”

2020-2025

Effective October 8, 2020

Table of Contents

District Mission Statement	3
Time Period for this Plan	3
Guiding Principles	3
General Description, Location and Extent	4
Topography and Drainage	5
Groundwater Resources	5
Ogallala Aquifer	5
Cretaceous Aquifer	6
Dockum Aquifer	7
Surface Water Resources	7
1. Estimates of Modeled Available Groundwater	7
2. Estimates of Historic Groundwater Usage.....	8
3. Estimates of Annual Groundwater Recharge from Precipitation.....	8
4. Estimates of Annual Groundwater Discharge to Springs/Surface Water Bodies	8
5. Estimates of Annual Groundwater Flow Into/Out of the District for the Ogallala:	
Estimates of Annual Groundwater Flow between Aquifers in the District	8
6. Estimates of Projected Total Demand for Water, and Projected Total Surface	
Water Supplies in the District.....	8
7. Water Supply Needs and Water Management Strategies	8
Actions, Procedures, Performance and Avoidance for Plan Implementation and	
Details of How the District will Manage Groundwater Supplies.....	9
Drought Contingency Plan	9
Regional Water Planning	10
Goals, Management Objectives and	
Performance Standards	10
Method for Tracking the District's Progress in	
Achieving Management Goals	10
Goals	11
References	17

List of Tables

Table 1	Board of Directors of the Llano Estacado Underground Water Conservation District	4
Appendix A	Modeled Availability Groundwater (MAG) Run 16-028	
Appendix B	Estimated Historical Water Use and 2017 State Water Plan Datasets	
Appendix C	Groundwater Availability Modeling (GAM) Run 19-017	

District Mission Statement

The Llano Estacado Underground Water Conservation District (the District) will develop, promote, and implement management strategies to provide for the conservation, preservation, protection, recharging, and prevention of waste of the groundwater resources, over which it has jurisdiction authority, for the benefit of the people that the District serves.

Time Period for this Plan

This plan becomes effective October 8, 2020, upon adoption by the Board of Directors (the Board) of the District and remains in effect until a revised plan is approved or until October 8, 2025, whichever is earlier.

Guiding Principles

The District was formed, and has been operated from its inception, with the guiding belief that the ownership and production of groundwater is a private property right. It is understood that, without the District, there is no protection of private property rights. The methods of protecting private property rights in groundwater are implemented using the policies adopted by the locally elected board members.

The Board understands the responsibilities of the District and creates programs necessary for meeting them. The Board believes that the District should be more knowledgeable of its groundwater resources than any other entity.

Additionally, the Board realizes that the aquifer extends beyond the District's boundaries, and the sharing of information, programs and ideas with neighboring districts is important. As a result, the District will consider the joint administration of certain programs when practical.

This management plan is a tool which provides continuity in the management of the District. The District staff uses this guide to ensure that the goals of the District are met. The Board uses it for planning, as well as measuring the performance of the staff.

Conditions change over time which requires that the Board modify this document. The dynamic nature of this plan shall be maintained such that the District continues serving the needs of the constituents. At the very least, the Board will review and readopt this plan every five years, or as specified by Chapter 36, Texas Water Code.

In the opinion of the Board, the goals, management objectives, and performance standards in this planning document have been set at a reasonable level considering existing and future fiscal and technical resources. Evolving conditions may change the management objectives defined to reach the stated goals. Whatever the future holds, the following guidelines are used to ensure the management objectives are set at a realistic and effective level:

- The District's constituency will determine if the District's goals are set at a level that is both meaningful and attainable; through their voting right, the public will appraise the District's overall performance in the process of electing or re-electing Board members.

- The duly elected Board will guide and direct the District staff and will gauge the achievement of the goals set forth in this document.
- The interests and needs of the District’s constituents shall control the direction of the management of the District.
- The Board will maintain local management of the privately-owned resource over which the District has jurisdictional authority, as provided by Chapter 36, Texas Water Code.
- The Board will evaluate District activities on a fiscal year basis. That is, the District budgets operations on a October 1 - September 30 fiscal year. When considering stated goals, management objectives, and performance standards, any reference to the terms annual, annually, or yearly will refer to the fiscal year of the District.

General Description, Location and Extent

The District was created by HB 530 (72nd Legislature) during 1991. The District was confirmed by voter approval, the initial Board elected, and an ad valorem tax rate cap of \$0.02/\$100 valuation was set in an election held in November 1998. Table 1 lists the current Board of Directors, office held, occupation, and term.

Table I: Board of Directors of the Llano Estacado Underground Water Conservation District

Office	Name	Occupation	Term Ends
President	Weldon Shook	Active Farmer	May 2023
Vice-President	Charles Rowland	Active Farmer	May 2021
Secretary	Walter Billings	Active Farmer	May 2023
Member	Larry Day	Active Farmer	May 2021
Member	Robert Warren	Active Farmer	May 2021

Originally, the jurisdictional extent of the District is the same as Gaines County, Texas. The District covers approximately 1525 square miles of the Southern High Plains of Texas. Seminole (pop. 7,629), the county seat, is the largest municipality in the District. Seagraves (pop. 2,846) and Loop (pop. 225) are the other incorporated communities in the District.

The District is bordered on the north by the Sandy Land UWCD (Yoakum County) and South Plains UWCD (Terry and Hockley Counties), on the east by Mesa UWCD (Dawson County), on the south by Andrews County, and on the west by the State of New Mexico.

The economy of the District is supported predominately by row crop agriculture and oil and gas production. The 317,000 plus acres of irrigated cropland affords economic stability to the area. The major crops cultivated within the District include: cotton, peanuts, grain sorghum, wheat and corn; and, to a lesser extent, watermelons, sunflowers, hay, and cucumbers.

Gaines County has long been known as one of the top producers of oil and gas in the state. In 2019, companies produced over 1.6M BBLs of crude oil in the county. A significant portion of the District’s tax-based revenues are generated by mineral valuation. Fluctuating oil prices are a challenge to the budgeting process.

Topography and Drainage

The land surface in the District is a nearly level to very gently undulating constructional plain that has little dissection. Deep, moderately permeable, sandy soils predominate the region.

The elevation ranges from about 3,700 feet above sea level in the northwest part of the District to 2,935 feet above sea level in the southeast corner of the District.

Several relict drainage ways cross the District from northwest to southeast. These “draws” (Sulfur, McKenzie, Wordswell, Seminole, and Monument) are shallow and usually dry; they seldom carry runoff water.

Cedar Lake and McKenzie Lake are the largest salt lakes in the District. In periods of normal rainfall, McKenzie Lake occupies approximately 1,500 acres, and Cedar Lake, approximately 3,500 acres. The lakes are bordered by calcareous soils that support various salt – tolerant sedges and grasses. The soils around the lakes and in the lake bottoms are strongly affected by alkali and are not conducive to agricultural activities.

Playas, or shallow lakes, are more common in areas where fine sandy loam and sandy clay loam soil types prevail. Playas range in size from 2 to 10 acres and are important vectors for local aquifer recharge.

Groundwater Resources

The District has jurisdiction over all groundwater that lies within the District’s boundaries. Three aquifers, the Ogallala, the Cretaceous, and the Dockum occur within the District. The following is a description of geological formations that may be beneficial to District constituents by providing useable quantities of groundwater.

Ogallala Aquifer

The Ogallala Aquifer is the primary source of groundwater in the District (Figure 1) (Appendix A). Saturated sections range from less than 10 feet to more than 180 feet in the area covered by the District.

The formation consists of heterogeneous sequences of clay, silt, sand and gravel. These sediments are thought to have been deposited by eastward-flowing, aggrading streams that filled and buried valleys eroded into pre-Ogallala rocks. A resistant layer of calcium carbonate-cemented caliche known locally as the “caprock” occurs near the surface of much of the area (Ashworth and Hopkins, 1995).

Water levels in the Ogallala Aquifer are influenced by the rate of recharge and discharge. Recharge occurs primarily by infiltration of precipitation. GAM studies show that recharge is greater beneath irrigated lands. To a lesser extent, recharge may also occur by upward leakage from underlying Cretaceous units that, in places, have a higher water table elevation than the Ogallala. Generally, only a small percentage of water from precipitation actually

reaches the water table due to a combination of limited annual precipitation (15.8 inches per year), high evaporation rate (60 – 70 inches per year), and slow infiltration rate. However, where deep sands are prevalent, and the water table is shallow, precipitation may affect recharge rather quickly.

Groundwater in the aquifer generally flows from northwest to southeast, normally at right angles to water level contours. Velocities of less than one foot per day are typical, but higher velocities may occur along filled erosional valleys where coarser grained deposits have greater permeability.

Discharge from the Ogallala Aquifer within the District primarily occurs through the pumping of irrigation wells. Groundwater usage typically exceeds recharge and results in water-level declines (Ashworth and Hopkins, 1995).

The chemical quality of Ogallala groundwater varies greatly across the District. Total Dissolved Solids (TDS) values varies from less than 600 mg/L to over 6,000 mg/L. Generally, groundwater in the eastern and southeastern parts of the District exhibits the highest TDS. Isolated occurrence of high TDS concentrations elsewhere in the District may be due to pollution through oil field salt water disposal pits or upward leakage and mixing from the underlying Cretaceous Aquifer.

The suitability of groundwater for irrigation purposes is largely dependent on the chemical composition of the water and is determined primarily by the total concentration of soluble salts. Some farm acreage in the District is already limited to certain varieties of salt tolerant crops due to limiting or damaging total salt levels.

Cretaceous Aquifer

The Edwards-Trinity (High Plains) Aquifer, commonly referred to as the Cretaceous Aquifer, underlies the Ogallala Aquifer in the northern half of the District (Figure 2) (Appendix A). In some areas of the District, the Cretaceous and Ogallala aquifers may be hydrologically connected. Groundwater in the Cretaceous is generally fresh to slightly saline. Water quality deteriorates where Cretaceous formations are overlain by saline lakes.

Studies performed by the District suggest that water quality in Cretaceous units is generally similar to that of the Ogallala. However, there are some instances where it has been discovered that lower Cretaceous units have poor quality water. This work is a continual investigation and limited by the sparse locations of Cretaceous water wells. Further work should provide additional understanding of this issue.

As Ogallala water levels decline, it is expected that there will be greater interest in this minor aquifer. The District is implementing a water level measurement program for this minor aquifer and is committing additional resources to the study of Cretaceous units.

Recharge of the Cretaceous occurs directly from the bounding Ogallala Formation. Some upward movement of groundwater from the underlying Triassic Dockum formation may also occur, affecting recharge of the Cretaceous (Ashworth and Hopkins, 1995). As mentioned earlier, in some places the potentiometric surface elevation of the Cretaceous Aquifer is higher than the water table elevation of the Ogallala Aquifer, resulting in the upward leakage from the Cretaceous Aquifer. Movement of water in the Cretaceous is generally east to southeast.

Dockum Aquifer

The Dockum Aquifer underlies the Cretaceous and Ogallala formations throughout the District (Figure 3) (Appendix A). The primary water-bearing zone in the Dockum Group, commonly called the “Santa Rosa”, consists of up to 700 feet of sand and conglomerate interbedded with layers of silt and shale (Ashworth and Hopkins, 1995). Aquifer permeability is typically low and well yields normally do not exceed 300 gal/min.

Water quality in the Dockum is the main limiting factor when considering its use within the District (Ashworth and Hopkins, 1995). Electrical Conductance (EC) values for Dockum groundwater range from 15.0 deciSiemens per meter (dS/m) to over 50.0 dS/m. Even the most salt tolerant row crops grown cannot withstand such levels of salinity.

Currently, it seems the only practical use of Dockum groundwater may be for make-up water in secondary recovery operations of crude oil. By using water from this aquifer, oil companies could reduce their use of Ogallala and/or Cretaceous groundwater, thereby relieving some pressure from the freshwater sources.

At some point, it may be feasible to treat Dockum water for use as municipal supply. As desalination technology evolves, this process might be feasible for meeting some needs within the District. However, due to the limited productivity of this aquifer, it is likely best suited (using this scenario) for stock or municipal supply. These uses permit a storage system for water that is not available for agricultural irrigation usage.

Surface Water Resources

The only fresh surface water in the District are playa lakes. The playas play an important role in aquifer recharge and support some wildlife when rainfall accumulates in these naturally occurring depressions. Playas are rarely, if ever, used to support irrigation activities.

As previously mentioned, Cedar Lake and McKenzie Lake are naturally occurring salt lakes within the District. Each of these naturally occurring impoundments support limited wildlife populations, primarily migratory waterfowl and opportunistic predators.

1. Estimates of Modeled Available Groundwater

GMA 2 adopted Desired Future Conditions (DFC) for relevant aquifers in October 2016. The relevant aquifers are the Ogallala, Edwards-Trinity (High Plains) and Dockum aquifers. The DFC for the Ogallala and Edwards-Trinity (High Plains) aquifers is average drawdown of between 23 and 27 feet for all of GMA2. The drawdown is calculated from the end of 2012 conditions to the year 2070. The drawdown is expressed as a range due to the link between future pumping and future rainfall. As documented in GMA 2 Technical Memorandum 15-01 and 16-01, of the TWDB GAM Run 16-028 MAG report which is in appendix A of this groundwater management plan. The historic pumping is higher in dry years than in wet years. Since most of the water use in GMA 2 from the Ogallala Aquifer is for irrigation, producers pump more groundwater in dry years than in

normal or wet years. The simulations assumed that initial pumping rates in the future would be between 100 percent and 150 percent of 2012 pumping rates. Essentially, in average or wet years, initial annual pumping rates could be as high as 150 percent of 2012 pumping rates based on the variation of pumping rates in the recent past. For Estimated Modeled Available Groundwater for the Llano Estacado UWCD, refer to the *GMA 2 MAG report table from the TWDB GAM Run 16-028 MAG Report, Appendix A*

2. Estimates of Historical Groundwater Usage

The estimated historical water use from the TWDB Estimated Historical Water Use Survey (WUS) are estimations of the historical quantity of groundwater used in the District. It will be used as a guide to estimate future demands on the resource in the District. It should be emphasized that the quantities shown are estimates.

Refer to the TWDB Estimated Historical Groundwater Use and 2017 State Water Plan Data Sets, Appendix B

3. Estimates of Annual Groundwater Recharge from Precipitation

Refer to GAM Run 19-017, Appendix C

4. Estimates of Annual Groundwater Discharge to Springs/Surface Water Bodies

Refer to GAM Run 19-017, Appendix C

5. Estimates of Annual Groundwater Flow Into/Out of the District for the Ogallala: Estimates of Annual Groundwater Flow between Aquifers in the District

Refer to GAM Run 19-017, Appendix C

6. Estimates of Projected Total Demand for Water, and Projected Total Surface Water Supplies in the District

Projecting water demand is a challenging task. Some user group projections are more accurate than others. This is an inherent part of the process. Of particular difficulty is the projection of irrigation water demand. Rainfall, commodity prices, water level changes, and federal farm policy are a few of the factors that complicate the matter. There are no projected surface water supplies in the district.

Refer to the TWDB Estimated Historical Groundwater use and 2017 State Water Plan Data Sets, Appendix B

7. Water Supply Needs and Water Management Strategies

It is required that the District Management Plan consider the water supply needs and water management strategies included in the 2017 State Water Plan (TWC 36.1071(e)(4)).

The 2015 Region O Regional Water Plan shows unmet demands in Gaines County in the irrigation, municipal, and county other categories. The strategies that will be used to meet these needs are conservation, development of new supplies, new groundwater supply and brackish water desalination. The majority of the unmet needs are in the irrigation category, and will be met by the producers adjusting their farming practices to meet the available water. This falls under the conservation strategy, which will meet nearly all of the county's needs in the future. It is possible municipal needs may also be met by developing new supplies or new groundwater supplies from currently owned land purchased for that purpose.

Actions, Procedures, Performance and Avoidance for Plan Implementation and Details of How the District will Manage Groundwater Supplies

The District currently employs a set of rules governing the spacing and production of wells, as well as production limits based on tract size. It is expected that this approach will remain the foundation of the Board's strategies for groundwater management. As conditions dictate, and as the DFC process is completed, it may require that the specific provisions within the existing rules be modified. The District's Board of Directors is responsible for that determination. The District's rules are available on the District web site: <http://www.lanoestacadouwcd.org/rules.html>

Additional water management strategies the District may consider, when applicable, are listed below.

- A. Conversion to Dryland Farming – As water supplies decline, there are some landowners that may exercise this option. There are incentive payments available through the USDA NRCS for those interested in this option. The District supports the use of these incentive payments to help those landowners interested in this program.
- B. Increased study of Minor Aquifers – Some future needs may be addressed using the two minor aquifers, the Cretaceous (Edwards – Trinity High Plains) and the Dockum, within the District. At this time, it is uncertain what additional amount of water may be available from minor aquifers. The District supports the continued and further investigation of these resources and is committed to the monitoring and study of them.
- C. Conservation Programs – The implementation of educational programs and resources regarding conservation remains top priority for the District. The Board supports the expansion of resources pertaining to those programs, which include, but are not limited to: maximizing crop water use efficiency, minimizing irrigation water evaporative losses, rainwater harvesting, use of water wise plants and drought tolerant landscaping, wise water use, and device giveaways.

Drought Contingency Plan

Drought is a normal, recurrent feature of climate, although many erroneously consider it a rare and random event. Drought is also a temporary aberration, and differs from aridity, which is restricted to low rainfall regions and is a permanent feature of climate ("What is Drought?" National Drought Mitigation Center). The Llano Estacado Underground Water Conservation District is in a semi-arid region that also experiences drought. However, even in the midst of a drought, rainfall at crucial times of the growing season may significantly reduce irrigation water demand.

Drought response conservation measures typically used in other regions of Texas (i.e. rationing) cannot and are not used in this region due to extreme economic impact potential. In the District, groundwater conservation is stressed at all times. The Board recognizes that irrigated agriculture provides the economic stability to the communities within the District. Therefore, through the notice and hearing provisions required in the development and adoption of this management plan, the Board adopts the official position that, in times of precipitation shortage, irrigated agricultural producers will not be limited to any less usage of groundwater than is provided for by District rules.

In order to treat all other groundwater user groups fairly and equally, the District will encourage more stringent conservation measures, where practical, but likewise, will not limit groundwater use in any way not already provided for by District rules.

Regional Water Planning

The Board of Directors recognizes the regional water plan requirements listed in Ch. 36, TWC, §36.1071. Namely, the District's management plan must be forwarded to the regional water planning group for their consideration in their planning process, and the plan must address water supply needs such that there is no conflict with the approved regional water plan. It is the Board's belief that no such conflict exists.

The Board agrees that the regional water plan should include the District's best data. The Board also recognizes that the regional water planning process provides a necessary overview of the region's water supply and needs. However, the Board also believes it is the duty of the District to develop the best and most accurate information concerning groundwater within the District.

Goals, Management Objectives and Performance Standards

Method for Tracking the District's Progress in Achieving Management Goals

The District Manager will prepare an annual report of the District's performance achieving management goals and objectives. The report will be prepared in a format that will be reflective of the performance standards listed following each management objective. The report will be presented to the Board within 60 days after September 30. The report will be maintained on file in the open records of the District.

The District will actively enforce all rules of the District in order to conserve, preserve, protect and prevent the waste of the groundwater resources over which the District has jurisdictional authority. The Board will periodically review the District's rules, and may modify the rules, with public approval, to better manage the groundwater resources within the District and to carry out the duties prescribed in Chapter 36, Texas Water Code.

Goal 1.0 Providing the Most Efficient Use of Groundwater

Management Objective-Water Level Monitoring

1.01 Measure the depth to water in the District's water level monitoring well Network and record measured levels in a database to support tracking of DFC attainment.

Performance Standards

1.01a Report the number of wells measured in the annual report to the Board.

1.01b Report the number of wells added to the network, if required, each year in the annual report to the Board.

Management Objective-Technical Field Services

1.02 Provide technical field services including flow testing and drawdown measurement for wells and irrigation systems.

Performance Standards

1.02a Report the number of field service tests performed each year in the annual report to the Board.

Management Objective-Laboratory Services

1.02 Provide basic water quality testing services. Maintain a record of tests performed by entering the results in the District's database.

Performance Standards

1.03a Report the number of laboratory service tests in the annual report to the Board.

1.03b Report the number of records entered into District's computer database each year in the annual report to the Board.

Management Objective – Water Use Monitoring

1.04 Monitor seasonal irrigation applications using a network of cooperative producers.

Performance Standards

1.04a Report the number of irrigation systems in the cooperative program in the annual report to the Board.

1.04b Report the number and type of crops monitored in the annual report to the Board.

1.04c Report the average irrigation application by crop in the annual report to the Board.

Management Objective-Irrigation System Inventory

1.05 Every five years perform a physical inventory of irrigation systems in the District. Enter data in District's data base file by block and section.

Performance Standards

1.05a Report the number of irrigation systems recorded each documenting period in the annual report to the Board.

1.05b Report the number of active irrigation systems by type in District's database in the annual report to the Board.

Goal 2.0 Controlling and Preventing Waste of Groundwater

Management Objective-Well Permitting and Well Completion

2.01 Issue temporary water well drilling permits for the drilling and completion of non-exempt water wells. Inspect all well sites to be assured that the District's completion and spacing standards are met.

Performance Standards

2.01a Report the number of water well drilling permits issued each year in the annual report to the Board.

2.01b Report the number of well sites inspected after well completion each year in the annual report to the Board.

Management Objective-Open, Deteriorated or Uncovered Wells

2.02 If an open, deteriorated or uncovered well is found, the District will insure that the open hole is properly closed according to District rules and, in so doing, prevent potential contamination of the groundwater resource. The District will contact the party responsible for the open, deteriorated or uncovered. The site will be inspected after notification to ensure the well closure process occurs.

Performance Standards

2.02a Report the number of open, deteriorated or uncovered wells in the annual report to the Board.

2.02b Report the number of initial inspections accomplished each year in the annual report to the Board.

Management Objective-Maximum Allowable Production

2.03 The District will investigate reports of usage of groundwater in excess of the maximum production allowable under the District's rules.

Performance Standards

2.03a Report the number of reports in the annual report to the Board.

Management Objective-Water Quality Monitoring

2.04 Conduct a District-wide water quality testing program. The results will be entered in to the District's computer database, and will be made available to the public.

Performance Standards

2.04a Report the number of samples collected and analyzed each year in the annual report to the Board.

Goal 3.0 Controlling and Preventing Subsidence

The TWDB subsidence risk report figure 4.32 indicated less than 100' of clay in Gaines County. Examination of Ogallala well logs in the county showed a range of 0 to 40 feet of clay, and an average of approximately 12 feet. Wells completed in the Edwards

Trinity (Plateau) reported slightly more, averaging 21 feet of clay. In the TWDB report figure 4.33, a general statewide subsidence risk map, Gaines County appears to be shown as a medium subsidence risk area.

The District used the TWDB Subsidence Model Identification of the Vulnerability of the Major and Minor Aquifers of Texas to Subsidence with Regard to Groundwater Pumping – TWDB Contract Number 1648302062, by LRE Water:

<http://www.twdb.texas.gov/groundwater/models/research/subsidence/subsidence.asp> to check estimated subsidence risk values in selected new wells. New wells were selected since current practice is to complete wells into the Edwards-Trinity aquifer as well as the overlying Ogallala aquifer. Predicted risk factors calculated ranged from 2.8 to 4.4 for the wells checked. According to the model results, this corresponds to a low-to-medium risk.

The District measures water levels, collects water quality samples, monitors meter readings, and collects rainfall data, countywide, year around. Limited subsidence has been observed in 2 instances immediately adjacent to older existing irrigation wells. No other types of subsidence have been observed to date. The District continues to observe well conditions during routine operations, but declares this goal not applicable.

Goal 4.0 Addressing Conjunctive Surface Water Management Issues

Not applicable because there are no surface water resources in the District for use in conjunctive management.

Goal 5.0 Addressing Natural Resource Issues

Management Objective

5.01 The District will investigate, or refer to the proper agency, any Citizen's or District Initiated complaint related to surface water, groundwater, or any natural resource within the District.

Performance Standards

5.01a The District will record all complaints and report these annually to the District Board of Directors

Management Objective

5.02 The District will attend at least one Region O meeting at which natural resource issues are discussed.

Performance Standards

5.02a Report the number of Region O meetings attended by a District Representative in the annual report to the Board.

Management Objective

5.03 The District will track the number of wells being permitted and drilled to support oil and gas drilling and production operations.

Performance Standards

5.03a The District will track the number of wells being permitting and drilled to support oil and gas drilling and production operations and will report that in the annual report to the Board.

Goal 6.0 Addressing Drought Conditions

Management Objective-Rain Gauges

6.01 Maintain a network of rain gauges in the District. Publish rainfall data on the District's web site.

Performance Standards

6.01a Report the number of rain gauges in the network in the annual report to the Board.

6.02 The TWDB drought link, which has much useful drought information, and web site links. <https://www.waterdatafortexas.org/drought>

Goal 7.0 Addressing Conservation

Management Objective – Classroom Education

7.01 The District will promote water conservation through presentations given at schools within the District.

Performance Standards

7.01a Report the number of classroom presentations in the annual report to the Board.

Management Objective-News Releases

7.02 District staff will prepare news releases addressing groundwater Conservation groundwater quality and District activities.

Performance Standard

7.02a Report the number of news releases prepared for publication in local newspapers in the annual report to the Board.

Management Objective-Public Speaking Engagements

7.03 The District staff and/or directors shall present programs addressing groundwater conservation, groundwater quality and District information or activities.

Performance Standard

7.03a Report the number of programs presented in the annual report to the Board.

Management Objective-Printed Material Resource Center

7.04 Maintain a self-service printed material resource center in the District office. Conduct an annual inventory of these items. Through the inventory process, determine the number and type of materials obtained by the public each year.

Performance Standards

7.04a Report the number of items by type procured by the public from the resource center in the annual report to the Board.

Management Objective-Saturated Thickness Maps

7.05 Every 5 years, provide a saturated thickness map to show the varying thickness

of groundwater remaining in storage. The most recent saturated thickness map will be available at the District office and on District web site.

Performance Standards

7.05a Report the most recent saturated thickness map available at the District office and on District web site in the annual report to the Board.

Goal 8.0 Addressing Recharge Enhancement

8.01 A review of past work conducted by others indicates this goal is not appropriate at present. Therefore, this goal is not applicable.

Goal 9.0 Addressing Rainwater Harvesting

Management Objective – Public Awareness Program

9.01a The District will conduct an educational program for this conservation strategy at least once a year.

Performance Standards

9.01a Report the type of program conducted (i.e. newspaper article, public presentation) in the annual report to the Board.

Goal 10.0 Addressing Precipitation Enhancement

10.01 While the District did participate in this program for eleven years, the Board has since determined it is not cost-effective. Therefore, this goal is not applicable.

Goal 11.0 Addressing Brush Control

11.01 Existing programs administered by the USDA – NRCS are sufficient for addressing his goal. The Board does not believe that this activity is cost-effective and applicable for the District at this time. Therefore, this goal is not applicable.

Goal 12.0 Addressing Desired Future Condition of the Aquifers

Management Objective – Calculate Annual Drawdown

12.01 Each year the District will measure water levels in the District's water level monitoring well network. These measurements are stored in a database, graphs for each well are prepared, and long term trends calculated.

Performance Standards

12.01a Annually calculate and compare the composite long term water level trends to the District and GMA 2 DFC. This analysis will be presented to the Board annually and recorded in the annual report.

References

Area 2 September 19, 2013

GAM Task 13-026 TWDB Estimated Recoverable Storage for Aquifers in Groundwater Management

George, P.G., Mace, R.E., and Petrossian, R, 2011, Aquifers of Texas: Texas Water Development Board Report 380, 182 p.

HDR Engineering, Inc., 2000, Llano Estacada Regional Water Plan, Water Supplies and Water Needs Identified by Water User Group, Austin, TX, 93p.

Knowles, T., Nordstrom, P. L., and Klemt, W. B., 1984 Evaluating the Groundwater Resources of the High Plains of Texas: Texas Department of Water Resources Report 288, 4 vol.

Llano Estacado UWCD 2019 Irrigation System Survey

Oliver, Wade, Texas Water Development Board Groundwater Availability Modeling Section: GAM Run 19-017.

Peckham, D. S. and Ashworth, J. B., 1993, The High Plains Aquifer System of Texas, 1980 to 1990 Overview and Projections: Texas Water Development Board Report 341, 34 p.

Pederson, C. D., et al, 1997, Water for Texas: A Consensus Based Update to the State Water Plan: Texas Water Development Board, 3 vol.

Rainwater, K., 1998, Personal Communication, Texas Tech University, Lubbock, Texas

Sanders, D., 1962, Soil Survey of Terry County, Texas, U.S. Government Printing Office, Washington D.C., 57p.


TWDB Estimated Historical Water Use and 2017 State Water Plan Datasets for Llano Estacado UWCD, April, 2020

Appendix

A

**GAM RUN 16-028 MAG:
MODELED AVAILABLE GROUNDWATER FOR
THE OGALLALA, EDWARDS-TRINITY (HIGH
PLAINS), AND DOCKUM AQUIFERS IN
GROUNDWATER MANAGEMENT AREA 2**

Jerry Shi, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Section
(512) 463-5076
May 12, 2017

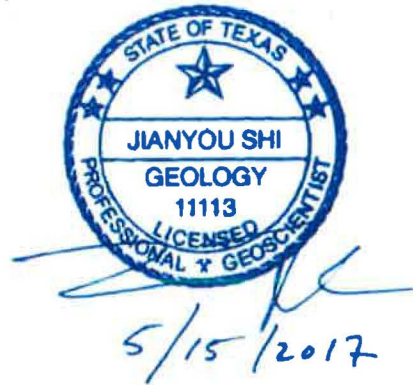

This page is intentionally left blank.

MODELED AVAILABLE GROUNDWATER FOR THE OGALLALA, EDWARDS-TRINITY (HIGH PLAINS), AND DOCKUM AQUIFERS IN GROUNDWATER MANAGEMENT AREA 2

Jerry Shi, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Section
(512) 463-5076
May 12, 2017

EXECUTIVE SUMMARY:

Modeled available groundwater for the Ogallala and Edwards-Trinity (High Plains) aquifers in Groundwater Management Area 2 ranges from 3,115,812 acre-feet per year in 2020 to 1,002,728 acre-feet per year in 2070. Modeled available groundwater for the Dockum Aquifer ranges from 30,566 acre-feet per year in 2020 to 29,705 acre-feet per year in 2070. The modeled available groundwater for the Ogallala and Edwards-Trinity (High Plains) aquifers is summarized by groundwater conservation districts and counties in Table 1, and by river basins, regional planning areas, and counties in Table 3. The modeled available groundwater for the Dockum Aquifer is summarized by groundwater conservation districts and counties in Table 2, and by river basins, regional planning areas, and counties in Table 4. The modeled available groundwater for Groundwater Management Area 2 calculated from counties is slightly different from that calculated from groundwater conservation districts because of the process for rounding the values.

The estimates are based on the desired future conditions for the High Plains Aquifer System (the Ogallala, Edwards-Trinity (High Plains), and Dockum aquifers) adopted by groundwater conservation district representatives in Groundwater Management Area 2 on October 19, 2016. The Pecos Valley Alluvium and Edwards-Trinity (Plateau) aquifers were declared not relevant for the purpose of joint planning. The Texas Water Development Board (TWDB) determined that the explanatory report and other materials submitted by the district representatives were administratively complete on December 19, 2016.

Please note that, for the High Plains Underground Water Conservation District No. 1, only the portion of relevant aquifers within Groundwater Management Area 2 is covered in this report.

REQUESTOR:

Mr. Jason Coleman, General Manager of High Plains Underground Water Conservation District No. 1 and Coordinator of Groundwater Management Area 2.

DESCRIPTION OF REQUEST:

In a letter dated November 1, 2016, Dr. William Hutchison, on behalf of Groundwater Management Area 2, provided the TWDB with the desired future conditions of the High Plains Aquifer System. The desired future conditions (defined by drawdown) were determined using a number of predictive groundwater flow simulations (Hutchison, 2016a, 2016b, 2016c, and 2016d). The predictive simulations were developed from the groundwater availability model for the High Plains Aquifer System (Version 1.01; Deeds and Jigmond, 2015). The predictive simulations modeled future pumping scenarios from 2013 through 2070 under different climatic conditions, with an initial water level equal to the last stress period (i.e. 2012) of the model by Deeds and Jigmond (2015). The drawdown was calculated as the water level difference between 2012 and 2070.

The desired future conditions for the High Plains Aquifer System, as described in Resolution No. 16-01, were adopted on October 19, 2016 by the groundwater conservation district representatives in Groundwater Management Area 2. The desired future conditions are described below:

Ogallala and Edwards-Trinity (High Plains) Aquifers

- [the] average drawdown of between 23 and 27 feet for all of [Groundwater Management Area] 2 as documented in [Groundwater Management Area] 2 Technical Memorandum 15-01 and [Groundwater Management Area] 2 Technical Memorandum 16-01. The drawdown is calculated from the end of 2012 conditions to the year 2070. The drawdown is expressed as a range due to link between future pumping and future rainfall. Since most of the water use in the Ogallala Aquifer is for irrigation, producers pump more groundwater in dry years than in normal or wet years.

Dockum Aquifer

- [the] average drawdown of 27 feet for all of [Groundwater Management Area] 2. The drawdown is calculated from the end of 2012 conditions to the year 2070 based on Scenario 16 as documented in [Groundwater Management Area] 2 Technical Memorandum 16-01.

After review of the submittal, TWDB sent an email on February 27, 2017 to Mr. Jason Coleman, Coordinator of Groundwater Management Area 2, to clarify pumping location and aquifer boundary. On April 20, 2017 TWDB received the final clarification email from Mr. Jason Coleman. TWDB then preceded the calculation of the modeled available groundwater which is summarized in the following sections.

METHODS:

To estimate the modeled available groundwater, TWDB used the predictive simulation for Scenario 16 (Hutchison, 2016d). TWDB reviewed the model files submitted by Hutchison (2016d) and slightly modified the groundwater pumping to achieve the adopted desired future conditions for the Ogallala and Edwards-Trinity (High Plains) aquifers. TWDB used the official aquifer boundaries to adjust the pumping in these two aquifers to achieve an average drawdown of 27 feet for all of Groundwater Management Area 2. This scenario represented drought conditions that are similar to the projected conditions used in the regional water planning process. For groundwater management purposes, pumping from this scenario may be adjusted to represent possible responses to various climatic conditions.

For the Dockum Aquifer, TWDB used the modeled extent submitted by Deeds and Jigmond (2015) to adjust the pumping to achieve an average drawdown of 27 feet for all of Groundwater Management Area 2, excluding the pass-through model cells. In addition to the Dockum Aquifer defined by TWDB, the modeled extent also includes the brackish/saline portion of the Dockum Group. According to Technical Memorandum 16-01 (Hutchison, 2016d), the groundwater conservation districts in Groundwater Management Area 2 wanted to include parts of the Dockum Group with poorer water quality for possible future development.

The modeled available groundwater values were extracted from the cell-by-cell budget file of the revised predictive model. Annual pumping rates were then divided by county, river basin, regional water planning area, and groundwater conservation district within Groundwater Management Area 2 (Figures 1 through 4 and Tables 1 through 4).

Modeled Available Groundwater and Permitting

As defined in Chapter 36 of the Texas Water Code, “modeled available groundwater” is the estimated average amount of water that may be produced annually to achieve a desired future condition. Groundwater conservation districts are required to consider modeled available groundwater, along with several other factors, when issuing permits in order to manage groundwater production to achieve the desired future condition(s). The other factors districts must consider include annual precipitation and production patterns, the estimated amount of pumping exempt from permitting, existing permits, and a reasonable estimate of actual groundwater production under existing permits.

PARAMETERS AND ASSUMPTIONS:

The parameters and assumptions for the groundwater availability are described below:

- Version 1.01 of the groundwater availability model for the High Plains Aquifer System by Deeds and Jigmond (2015) was revised to construct the predictive model simulation for this analysis. See Hutchison (2016d) for details of the initial assumptions.

- The model has four layers which represent the Ogallala and Pecos Valley Alluvium aquifers (Layer 1), the Edwards-Trinity (High Plains) and Edwards-Trinity (Plateau) aquifers (Layer 2), the Upper Dockum Aquifer (Layer 3), and the Lower Dockum Aquifer (Layer 4). Pass-through cells exist in layers 2 and 3 where the Dockum Aquifer was absent but provided pathway for flow between the Lower Dockum and the Ogallala or Edwards-Trinity (High Plains) aquifers vertically. These pass-through cells were excluded from the modeled available groundwater calculation.
- The model was run with MODFLOW-NWT (Niswonger and others, 2011). The model uses the Newton Formulation and the upstream weighting package which automatically reduces pumping as heads drop in a particular cell as defined by the user. This feature may simulate the declining production of a well as saturated thickness decreases. Deeds and Jigmond (2015) modified the MODFLOW-NWT code to use a saturated thickness of 30 feet as the threshold (instead of percent of the saturated thickness) when pumping reductions occur during a simulation.
- During the predictive model run, no model cells within Groundwater Management Area 2 went dry.
- For the High Plains Underground Water Conservation District No. 1, only the portion within Groundwater Management Area 2 is covered in this report.
- Estimates of modeled drawdown and available groundwater from the model simulation were rounded to whole numbers.

RESULTS:

The modeled available groundwater for the Ogallala and Edwards-Trinity (High Plains) aquifers combined that achieves the desired future condition adopted by Groundwater Management Area 2 decreases from 3,115,812 to 1,002,728 acre-feet per year between 2020 and 2070. The modeled available groundwater is summarized by groundwater conservation district and county in Table 1. Table 3 summarizes the modeled available groundwater by county, river basin, and regional water planning area for use in the regional water planning process.

The modeled available groundwater for the Dockum Group and Aquifer that achieves the desired future condition adopted by Groundwater Management Area 2 decreases slightly from 30,566 to 29,705 acre-feet per year between 2020 and 2070. The modeled available groundwater is summarized by groundwater conservation district and county in Table 2. Table 4 summarizes the modeled available groundwater by county, river basin, and regional water planning area for use in the regional water planning process.

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017
Page 7 of 19

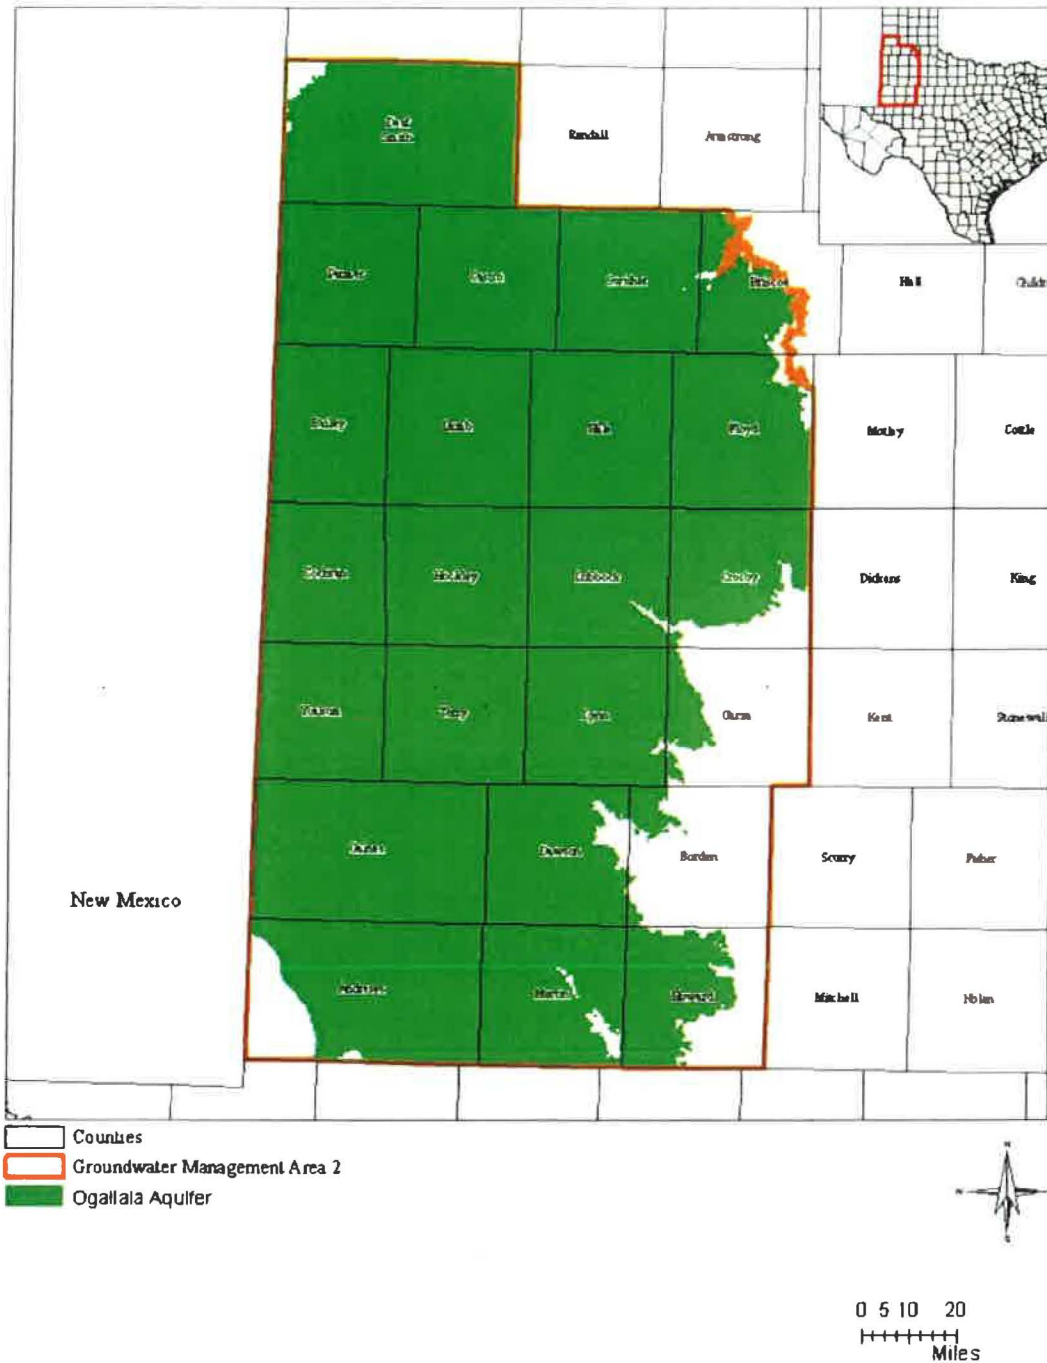


FIGURE 1. MAP SHOWING THE AREA COVERED BY THE GROUNDWATER AVAILABILITY MODEL FOR THE OGALLALA AQUIFER WITHIN GROUNDWATER MANAGEMENT AREA 2.

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017
Page 8 of 19

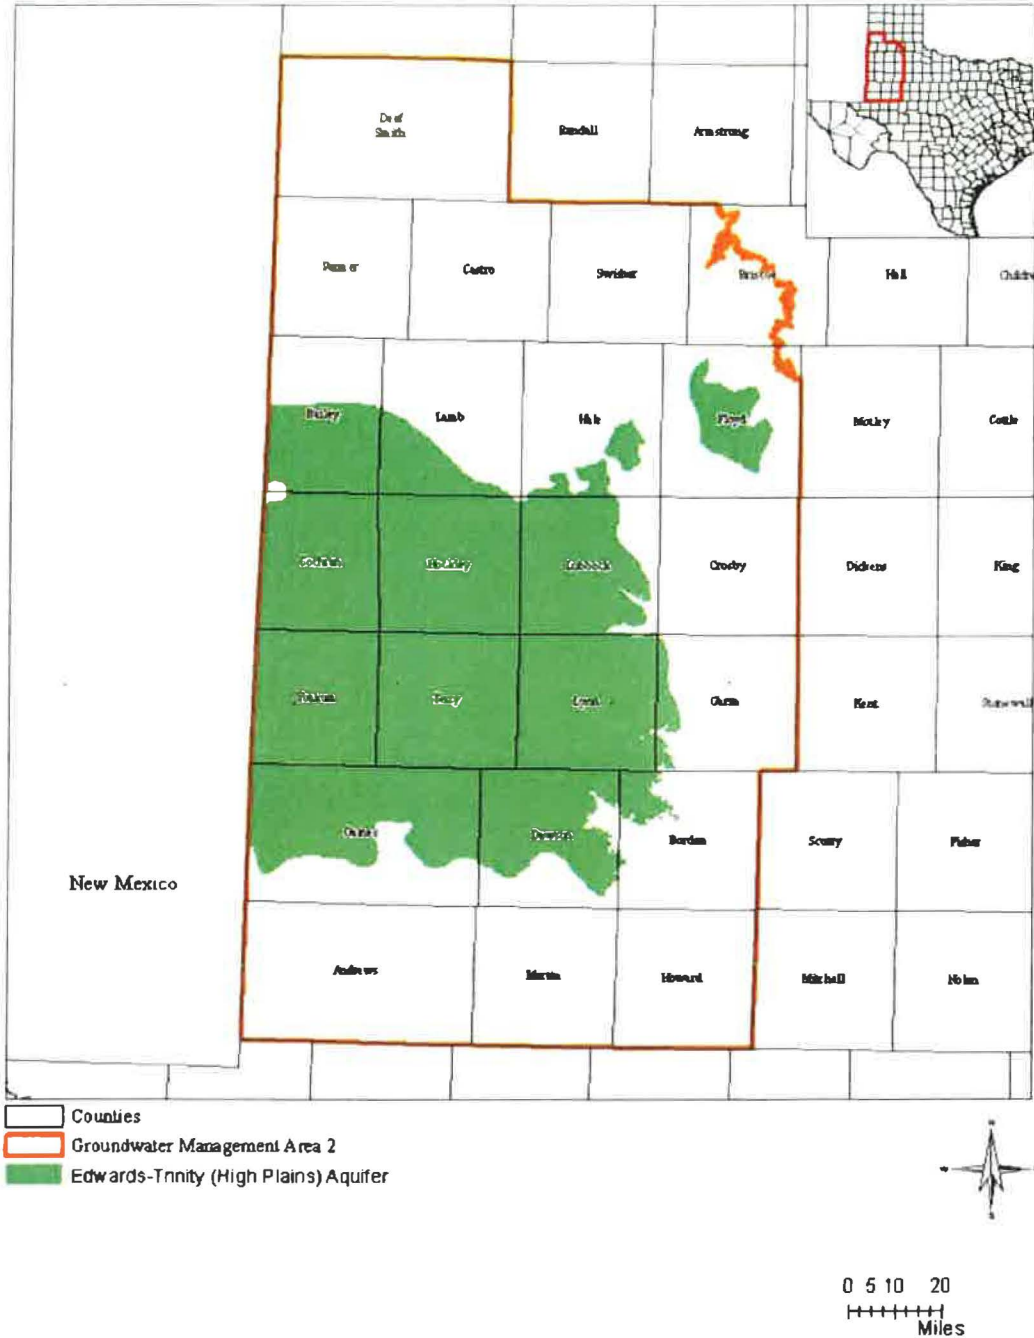


FIGURE 2. MAP SHOWING THE AREA COVERED BY THE GROUNDWATER AVAILABILITY MODEL FOR THE EDWARDS-TRINITY (HIGH PLAINS) AQUIFER WITHIN GROUNDWATER MANAGEMENT AREA 2.

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017
Page 9 of 19

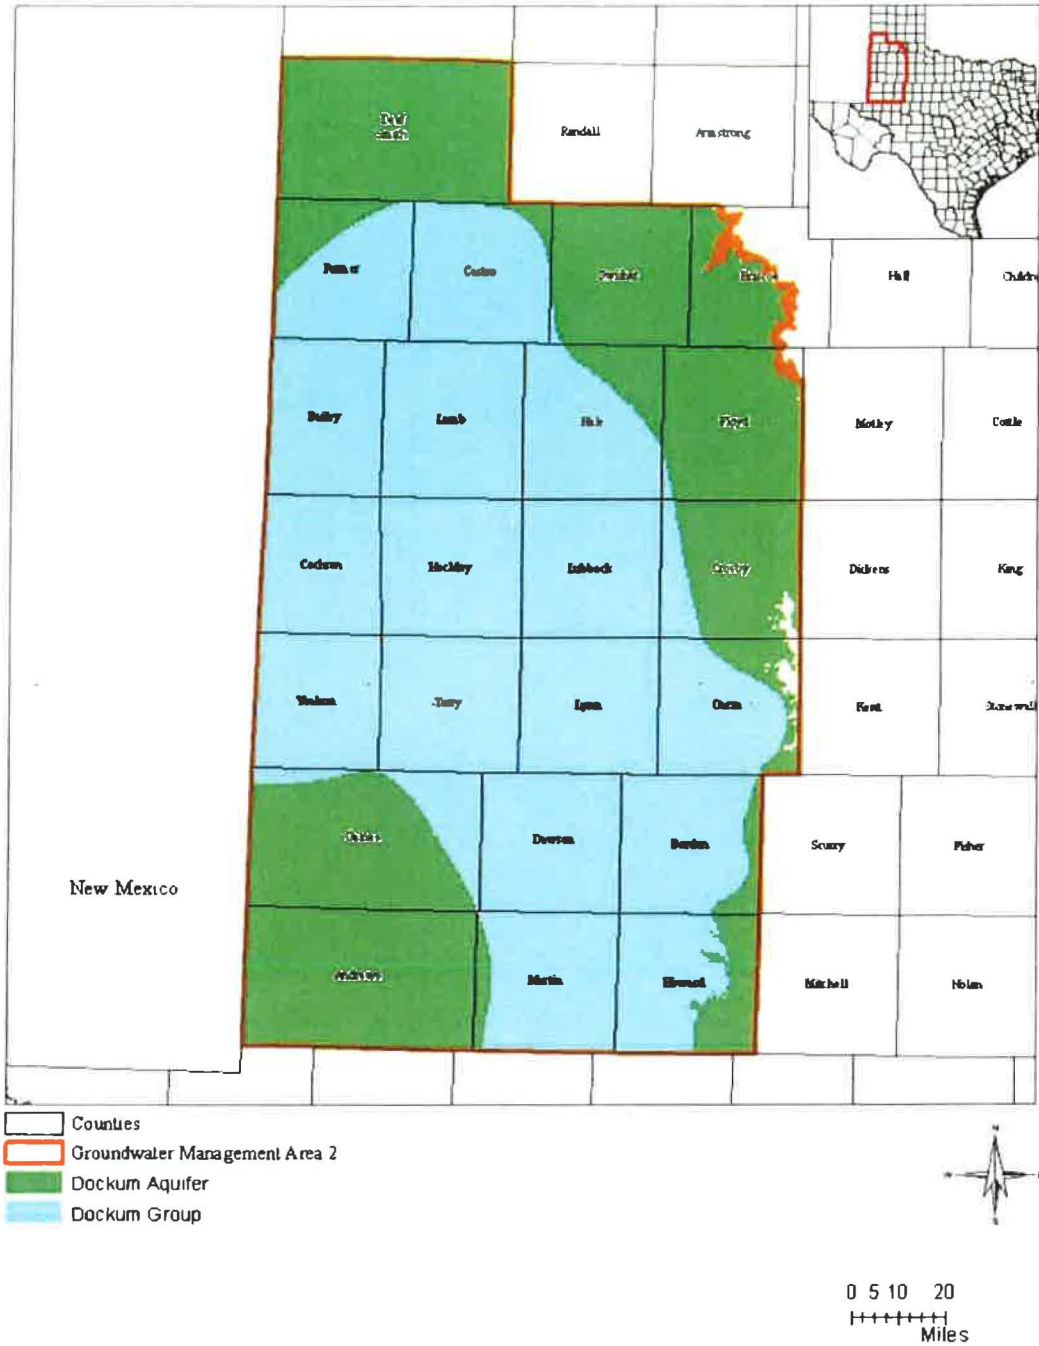


FIGURE 3. MAP SHOWING THE AREA COVERED BY THE GROUNDWATER AVAILABILITY MODEL FOR THE DOCKUM AQUIFER AND DOCKUM GROUP WITHIN GROUNDWATER MANAGEMENT AREA 2.

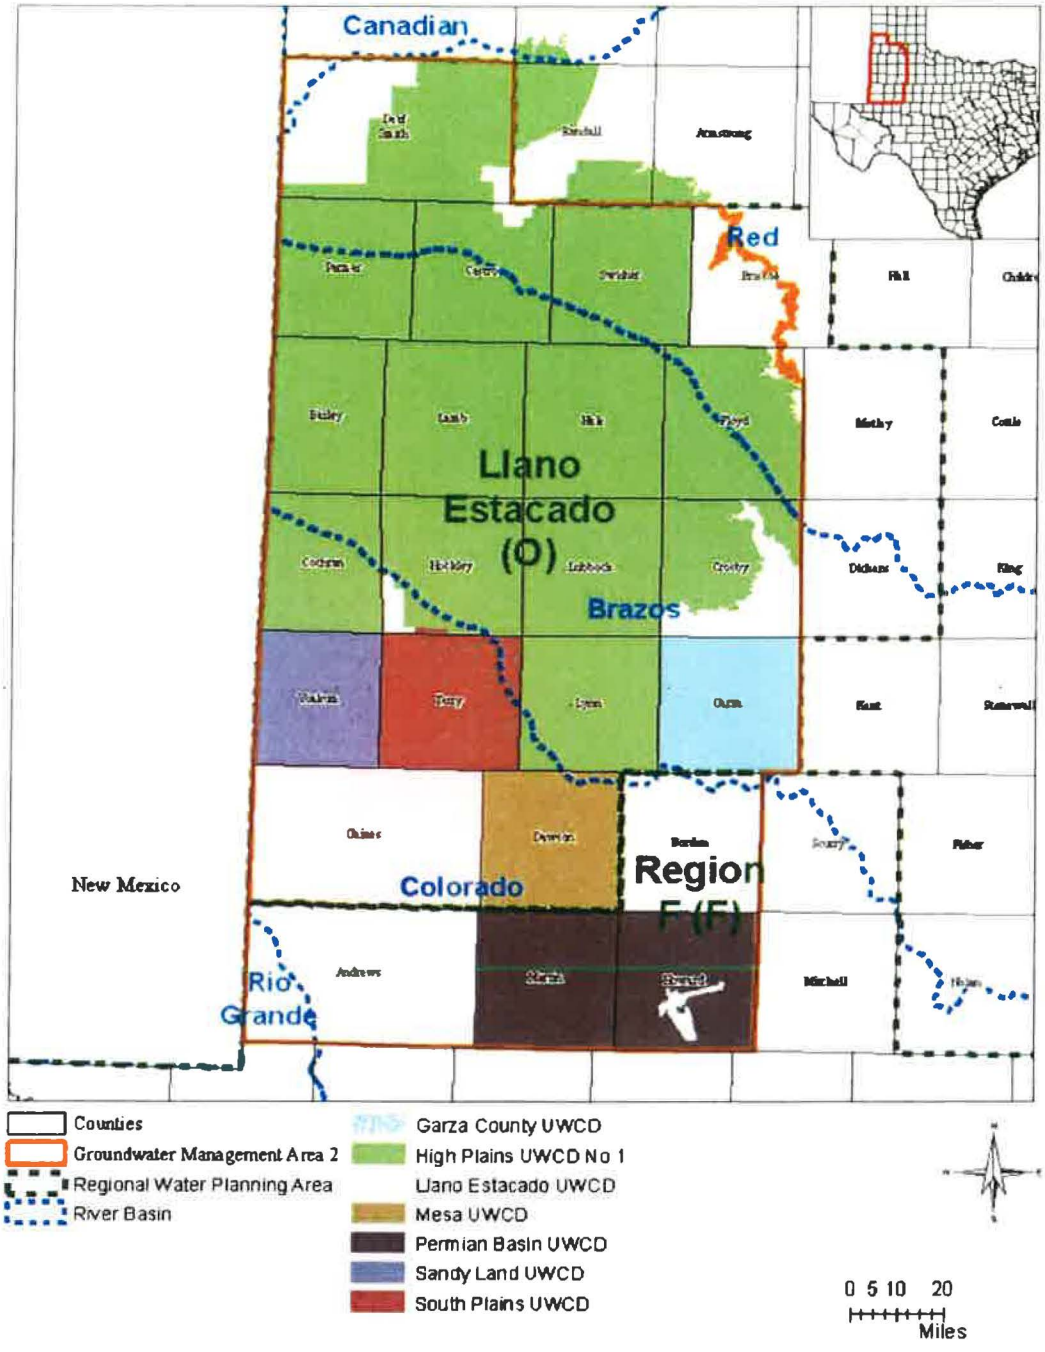


FIGURE 4. MAP SHOWING REGIONAL WATER PLANNING AREAS, GROUNDWATER CONSERVATION DISTRICTS (ALSO KNOWN AS UNDERGROUND WATER CONSERVATION DISTRICT OR UWCD), COUNTIES, AND RIVER BASINS IN GROUNDWATER MANAGEMENT AREA 2.

TABLE 1. MODELED AVAILABLE GROUNDWATER FOR THE OGALLALA AND EDWARDS-TRINITY (HIGH PLAINS) AQUIFERS IN GROUNDWATER MANAGEMENT AREA 2 SUMMARIZED BY GROUNDWATER CONSERVATION DISTRICT AND COUNTY FOR EACH DECADE BETWEEN 2020 AND 2070. VALUES ARE IN ACRE-FEET PER YEAR. (UWCD = UNDERGROUND WATER CONSERVATION DISTRICT)

Groundwater Conservation District	County	2012	2020	2030	2040	2050	2060	2070
Garza County UWCD Total	Garza	14,932	16,297	13,648	12,395	11,657	11,180	10,855
High Plains UWCD No.1	Bailey	79,604	97,679	67,307	51,199	42,704	37,858	34,815
High Plains UWCD No.1	Castro	200,692	261,434	181,190	102,732	55,811	35,734	26,291
High Plains UWCD No.1	Cochran	67,032	101,762	79,152	64,503	55,408	47,858	42,674
High Plains UWCD No.1	Crosby	124,336	163,188	108,662	68,885	46,778	35,651	29,619
High Plains UWCD No.1	Deaf Smith	148,161	182,988	118,471	74,107	51,551	40,042	33,785
High Plains UWCD No.1	Floyd	124,867	170,451	94,139	67,802	54,090	46,197	41,537
High Plains UWCD No.1	Hale	283,391	220,111	114,928	70,663	48,719	37,740	31,954
High Plains UWCD No.1	Hockley	132,145	154,091	96,609	71,741	60,822	55,285	52,185
High Plains UWCD No.1	Lamb	244,726	223,477	112,082	71,220	56,582	50,140	46,816
High Plains UWCD No.1	Lubbock	131,793	151,056	121,404	109,134	100,850	94,935	90,798
High Plains UWCD No.1	Lynn	81,678	112,607	96,151	85,494	78,603	74,349	71,640
High Plains UWCD No.1	Parmer	150,001	152,014	91,098	59,259	43,737	35,469	30,537
High Plains UWCD No.1	Swisher	119,658	129,283	71,638	46,284	33,912	27,019	22,783
High Plains UWCD No.1 Total		1,888,087	2,120,141	1,352,831	943,023	729,567	618,277	555,434
Llano Estacado UWCD Total	Gaines	266,072	277,954	218,338	184,298	162,643	147,743	138,294
Mesa UWCD Total	Dawson	122,802	172,851	123,476	96,796	82,283	74,610	69,928
Permian Basin UWCD	Howard	12,428	19,285	16,865	15,737	15,105	14,738	14,513
Permian Basin UWCD	Martin	41,993	63,463	51,126	43,861	39,793	37,210	35,425
Permian Basin UWCD Total		54,421	82,748	67,991	59,598	54,898	51,948	49,938
Sandy Land UWCD Total	Yoakum	131,815	138,940	92,952	69,400	58,308	52,469	48,940
South Plains UWCD	Hockley	3,527	4,895	2,213	726	389	283	240
South Plains UWCD	Terry	205,507	190,768	132,777	105,892	94,696	88,883	85,518
South Plains UWCD Total		209,034	195,663	134,990	106,618	95,085	89,166	85,758

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017

Page 12 of 19

Groundwater Conservation District	County	2012	2020	2030	2040	2050	2060	2070
No District-County	Andrews	19,037	24,937	21,375	19,795	18,774	18,040	17,474
No District-County	Borden	5,025	5,922	4,639	4,069	3,737	3,421	3,212
No District-County	Briscoe	27,107	29,022	17,637	11,907	9,053	7,445	6,451
No District-County	Castro	3,159	5,859	3,280	2,367	1,814	1,452	1,214
No District-County	Crosby	1,691	3,135	2,918	2,292	1,959	1,783	1,671
No District-County	Deaf Smith	16,585	23,348	18,932	15,981	14,110	12,791	11,821
No District-County	Hockley	10,604	18,445	13,065	5,303	2,577	1,618	1,185
No District-County	Howard	352	550	527	526	534	543	553
Groundwater Management Area 2		2,770,723	3,115,812	2,086,599	1,534,368	1,246,999	1,092,486	1,002,728

TABLE 2. MODELED AVAILABLE GROUNDWATER FOR THE DOCKUM AQUIFER IN GROUNDWATER MANAGEMENT AREA 2 SUMMARIZED BY GROUNDWATER CONSERVATION DISTRICT AND COUNTY FOR EACH DECADE BETWEEN 2020 AND 2070. VALUES ARE IN ACRE-FEET PER YEAR. (UWCD = UNDERGROUND WATER CONSERVATION DISTRICT)

Groundwater Conservation District	County	2012	2020	2030	2040	2050	2060	2070
Garza County UWCD Total	Garza	191	911	911	911	911	911	911
High Plains UWCD No.1	Bailey	7	833	833	833	833	833	833
High Plains UWCD No.1	Castro	323	425	425	425	425	425	425
High Plains UWCD No.1	Cochran	0	972	972	972	972	972	972
High Plains UWCD No.1	Crosby	2,883	3,787	3,787	3,787	3,787	3,787	3,787
High Plains UWCD No.1	Deaf Smith	2,134	4,395	4,395	4,395	4,395	4,395	4,395
High Plains UWCD No.1	Floyd	2,456	3,226	3,226	3,226	3,226	3,226	3,226
High Plains UWCD No.1	Hale	135	1,121	1,121	1,121	1,121	1,121	1,121
High Plains UWCD No.1	Hockley	28	973	973	973	973	973	973
High Plains UWCD No.1	Lamb	4	923	923	923	923	923	923
High Plains UWCD No.1	Lubbock	3	1,086	1,086	1,086	1,086	1,086	1,086
High Plains UWCD No.1	Lynn	81	912	912	912	912	912	912
High Plains UWCD No.1	Parmer	0	5,450	5,450	5,450	5,450	4,689	4,589
High Plains UWCD No.1	Swisher	1,200	1,576	1,576	1,576	1,576	1,576	1,576
High Plains UWCD No.1 Total		9,255	25,679	25,679	25,679	25,679	24,918	24,818
Permian Basin UWCD	Howard	737	1,471	1,471	1,471	1,471	1,471	1,471
Permian Basin UWCD	Martin	6	8	8	8	8	8	8
Permian Basin UWCD Total		743	1,479	1,479	1,479	1,479	1,479	1,479
No District-County	Andrews	4	1,319	1,319	1,319	1,319	1,319	1,319
No District-County	Borden	114	900	900	900	900	900	900
No District-County	Crosby	54	71	71	71	71	71	71
No District-County	Deaf Smith	27	6	6	6	6	6	6
No District-County	Hockley	0	83	83	83	83	83	83
No District-County	Howard	1	118	118	118	118	118	118
Groundwater Management Area 2		10,465	30,566	30,566	30,566	30,566	29,805	29,705

TABLE 3. MODELED AVAILABLE GROUNDWATER BY DECADE FOR THE OGALLALA AND EDWARDS-TRINITY (HIGH PLAINS) AQUIFERS IN GROUNDWATER MANAGEMENT AREA 2. RESULTS ARE IN ACRE-FEET PER YEAR AND ARE SUMMARIZED BY COUNTY, REGIONAL WATER PLANNING AREA (RWPA), AND RIVER BASIN.

County	RWPA	River Basin	2020	2030	2040	2050	2060	2070
Andrews	Region F	Colorado	24,937	21,375	19,795	18,774	18,040	17,474
Bailey	Llano Estacado	Brazos	97,679	67,307	51,199	42,704	37,858	34,815
Borden	Region F	Brazos	842	699	635	597	572	555
Borden	Region F	Colorado	5,080	3,940	3,433	3,140	2,849	2,657
Briscoe	Llano Estacado	Red	29,022	17,637	11,907	9,053	7,445	6,451
Castro	Llano Estacado	Red	107,563	72,432	43,208	25,577	17,236	12,970
Castro	Llano Estacado	Brazos	159,730	112,038	61,892	32,048	19,950	14,535
Cochran	Llano Estacado	Brazos	26,117	21,555	18,919	17,399	16,483	15,900
Cochran	Llano Estacado	Colorado	75,645	57,597	45,584	38,008	31,376	26,775
Crosby	Llano Estacado	Red	3,693	3,503	3,068	2,373	1,888	1,567
Crosby	Llano Estacado	Brazos	162,630	108,077	68,110	46,363	35,547	29,723
Dawson	Llano Estacado	Brazos	1,699	1,456	1,329	1,256	1,210	1,178
Dawson	Llano Estacado	Colorado	171,153	122,020	95,467	81,027	73,400	68,749
Deaf Smith	Llano Estacado	Red	206,336	137,403	90,088	65,661	52,833	45,606
Floyd	Llano Estacado	Red	25,808	25,101	24,583	23,926	22,995	22,109
Floyd	Llano Estacado	Brazos	144,643	69,038	43,219	30,165	23,203	19,428
Gaines	Llano Estacado	Colorado	277,954	218,338	184,298	162,643	147,743	138,294
Garza	Llano Estacado	Brazos	16,297	13,648	12,395	11,657	11,180	10,855
Hale	Llano Estacado	Red	472	455	358	266	197	150
Hale	Llano Estacado	Brazos	219,639	114,473	70,305	48,453	37,543	31,804

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017

Page 15 of 19

County	RWPA	River Basin	2020	2030	2040	2050	2060	2070
Hockley	Llano Estacado	Brazos	130,832	85,716	66,206	56,994	52,150	49,382
Hockley	Llano Estacado	Colorado	46,599	26,171	11,564	6,793	5,037	4,228
Howard	Region F	Colorado	19,835	17,391	16,264	15,638	15,281	15,066
Lamb	Llano Estacado	Brazos	223,477	112,082	71,220	56,582	50,140	46,816
Lubbock	Llano Estacado	Brazos	151,056	121,404	109,134	100,850	94,935	90,798
Lynn	Llano Estacado	Brazos	104,528	88,796	79,406	73,546	69,934	67,598
Lynn	Llano Estacado	Colorado	8,079	7,355	6,088	5,057	4,414	4,042
Martin	Region F	Colorado	63,463	51,126	43,861	39,793	37,210	35,425
Parmer	Llano Estacado	Red	73,758	40,228	24,334	17,703	14,499	12,655
Parmer	Llano Estacado	Brazos	78,257	50,870	34,925	26,034	20,971	17,881
Swisher	Llano Estacado	Red	103,982	60,806	40,124	29,802	23,926	20,249
Swisher	Llano Estacado	Brazos	25,301	10,833	6,160	4,109	3,092	2,534
Terry	Llano Estacado	Brazos	8,367	7,167	6,548	6,142	5,864	5,670
Terry	Llano Estacado	Colorado	182,401	125,610	99,345	88,554	83,019	79,849
Yoakum	Llano Estacado	Colorado	138,940	92,952	69,400	58,308	52,469	48,940
Groundwater Management Area 2			3,115,814	2,086,599	1,534,371	1,246,995	1,092,489	1,002,728

TABLE 4. MODELED AVAILABLE GROUNDWATER BY DECADE FOR THE DOCKUM AQUIFER IN GROUNDWATER MANAGEMENT AREA 2. RESULTS ARE IN ACRE-FEET PER YEAR AND ARE SUMMARIZED BY COUNTY, REGIONAL WATER PLANNING AREA (RWPA), AND RIVER BASIN.

County	RWPA	River Basin	2020	2030	2040	2050	2060	2070
Andrews	Region F	Colorado	1,319	1,319	1,319	1,319	1,319	1,319
Bailey	Llano Estacado	Brazos	833	833	833	833	833	833
Borden	Region F	Brazos	284	284	284	284	284	284
Borden	Region F	Colorado	617	617	617	617	617	617
Castro	Llano Estacado	Red	425	425	425	425	425	425
Cochran	Llano Estacado	Brazos	104	104	104	104	104	104
Cochran	Llano Estacado	Colorado	868	868	868	868	868	868
Crosby	Llano Estacado	Brazos	3,858	3,858	3,858	3,858	3,858	3,858
Deaf Smith	Llano Estacado	Red	4,401	4,401	4,401	4,401	4,401	4,401
Floyd	Llano Estacado	Red	250	250	250	250	250	250
Floyd	Llano Estacado	Brazos	2,976	2,976	2,976	2,976	2,976	2,976
Garza	Llano Estacado	Brazos	911	911	911	911	911	911
Hale	Llano Estacado	Red	29	29	29	29	29	29
Hale	Llano Estacado	Brazos	1,092	1,092	1,092	1,092	1,092	1,092
Hockley	Llano Estacado	Brazos	890	890	890	890	890	890
Hockley	Llano Estacado	Colorado	167	167	167	167	167	167
Howard	Region F	Colorado	1,589	1,589	1,589	1,589	1,589	1,589
Lamb	Llano Estacado	Brazos	923	923	923	923	923	923
Lubbock	Llano Estacado	Brazos	1,086	1,086	1,086	1,086	1,086	1,086
Lynn	Llano Estacado	Brazos	791	791	791	791	791	791

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017

Page 17 of 19

County	RWPA	River Basin	2020	2030	2040	2050	2060	2070
Lynn	Llano Estacado	Colorado	121	121	121	121	121	121
Martin	Region F	Colorado	8	8	8	8	8	8
Parmer	Llano Estacado	Red	2,298	2,298	2,298	2,298	2,298	2,298
Parmer	Llano Estacado	Brazos	3,152	3,152	3,152	3,152	2,392	2,291
Swisher	Llano Estacado	Red	1,551	1,551	1,551	1,551	1,551	1,551
Swisher	Llano Estacado	Brazos	25	25	25	25	25	25
Groundwater Management Area 2			30,568	30,568	30,568	30,568	29,808	29,707

LIMITATIONS:

The groundwater model used in completing this analysis is the best available scientific tool that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historic pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and streamflow are specific to a particular historic time period.

Because the application of the groundwater model was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations relating to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and groundwater levels in the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

GAM Run 16-028 MAG: Modeled Available Groundwater for the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers in Groundwater Management Area 2

May 12, 2017

Page 19 of 19

REFERENCES:

- Deeds, Neil E. and Jigmond, Marius, 2015, Numerical Model Report for the High Plains Aquifer System Groundwater Availability Model: Prepared for Texas Water Development Board, 640 p., http://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Numerical_Report.pdf.
- Hutchison, William, 2016a, GMA 2 Technical Memorandum 15-01 (Final): Ogallala Aquifer.
- Hutchison, William, 2016b, GMA 2 Technical Memorandum 15-02 (Final): Edwards-Trinity (High Plains) Aquifer.
- Hutchison, William, 2016c, GMA 2 Technical Memorandum 15-03 (Final): Dockum Aquifer.
- Hutchison, William, 2016d, GMA 2 Technical Memorandum 16-01 (Final): Predictive Simulation of the Ogallala, Edwards-Trinity (High Plains), and Dockum Aquifers (Scenario 16).
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.
- Niswonger, R.G., Panday, S., and Ibaraki, M., 2011, MODFLOW-NWT, a Newton formulation for MODFLOW-2005: United States Geological Survey, Techniques and Methods 6-A37, 44 p.
- Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>.

Appendix

B

Estimated Historical Water Use And 2017 State Water Plan Datasets:

Llano Estacado Underground Water Conservation District

by Stephen Allen

Texas Water Development Board

Groundwater Division

Groundwater Technical Assistance Section

stephen.allen@twdb.texas.gov

(512) 463-7317

April 12, 2020

GROUNDWATER MANAGEMENT PLAN DATA:

This package of water data reports (part 1 of a 2-part package of information) is being provided to groundwater conservation districts to help them meet the requirements for approval of their five-year groundwater management plan. Each report in the package addresses a specific numbered requirement in the Texas Water Development Board's groundwater management plan checklist. The checklist can be viewed and downloaded from this web address:

<http://www.twdb.texas.gov/groundwater/docs/GCD/GMPChecklist0113.pdf>

The five reports included in this part are:

1. Estimated Historical Water Use (checklist item 2)

from the TWDB Historical Water Use Survey (WUS)

2. Projected Surface Water Supplies (checklist item 6)

3. Projected Water Demands (checklist item 7)

4. Projected Water Supply Needs (checklist item 8)

5. Projected Water Management Strategies (checklist item 9)

from the 2017 Texas State Water Plan (SWP)

Part 2 of the 2-part package is the groundwater availability model (GAM) report for the District (checklist items 3 through 5). The District should have received, or will receive, this report from the Groundwater Availability Modeling Section. Questions about the GAM can be directed to Dr. Shirley Wade, shirley.wade@twdb.texas.gov, (512) 936-0883.

DISCLAIMER:

The data presented in this report represents the most up-to-date WUS and 2017 SWP data available as of 4/12/2020. Although it does not happen frequently, either of these datasets are subject to change pending the availability of more accurate WUS data or an amendment to the 2017 SWP. District personnel must review these datasets and correct any discrepancies in order to ensure approval of their groundwater management plan.

The WUS dataset can be verified at this web address:

<http://www.twdb.texas.gov/waterplanning/waterusesurvey/estimates/>

The 2017 SWP dataset can be verified by contacting Sabrina Anderson (sabrina.anderson@twdb.texas.gov or 512-936-0886).

For additional questions regarding this data, please contact Stephen Allen (stephen.allen@twdb.texas.gov or 512-463-7317).

Estimated Historical Water Use

TWDB Historical Water Use Survey (WUS) Data

Groundwater and surface water historical use estimates are currently unavailable for calendar year 2018. TWDB staff anticipates the calculation and posting of these estimates at a later date.

GAINES COUNTY

All values are in acre-feet

Year	Source	Municipal	Manufacturing	Mining	Steam Electric	Irrigation	Livestock	Total
2017	GW	2,921	337	6,178	0	305,058	289	314,783
	SW	0	0	0	0	0	32	32
2016	GW	2,683	336	5,124	0	325,473	129	333,745
	SW	0	0	0	0	0	14	14
2015	GW	2,722	363	4,851	0	312,119	128	320,183
	SW	0	0	0	0	0	14	14
2014	GW	3,165	513	5,056	0	304,582	139	313,455
	SW	0	0	0	0	0	15	15
2013	GW	3,374	655	5,109	0	360,353	137	369,628
	SW	0	0	0	0	0	15	15
2012	GW	3,588	517	5,166	0	424,388	180	433,839
	SW	0	0	0	0	0	20	20
2011	GW	3,866	522	5,378	0	404,205	203	414,174
	SW	0	0	0	0	0	23	23
2010	GW	3,353	1,512	5,221	0	318,882	194	329,162
	SW	0	0	160	0	0	22	182
2009	GW	3,159	5,027	1,806	0	344,607	187	354,786
	SW	0	0	451	0	0	21	472
2008	GW	3,014	4,364	2,770	0	496,890	203	507,241
	SW	0	0	742	0	0	23	765
2007	GW	2,773	77	1,406	0	381,479	113	385,848

Estimated Historical Water Use and 2017 State Water Plan Dataset

Llano Estacado Underground Water Conservation District

April 12, 2020

Page 4 of 1

	SW	0	0	0	0	0	13	13
2006	GW	3,106	60	1,537	0	385,340	369	390,412
	SW	0	0	0	0	0	41	41
2005	GW	3,001	65	1,537	0	394,580	506	399,689
	SW	0	0	0	0	0	56	56
2004	GW	2,893	56	1,559	0	413,261	419	418,188
	SW	0	0	0	0	0	104	104
2003	GW	3,190	88	1,453	0	391,496	539	396,766
	SW	0	0	0	0	0	135	135
2002	GW	3,089	78	1,512	0	470,616	617	475,912
	SW	0	0	0	0	0	154	154

Projected Water Demands TWDB 2017 State Water Plan Data

Please note that the demand numbers presented here include the plumbing code savings found in the Regional and State Water Plans.

GAINES COUNTY

All values are in acre-feet

RWPG	WUG	WUG Basin	2020	2030	2040	2050	2060	2070
O	COUNTY-OTHER, GAINES	COLORADO	1,403	1,763	2,205	2,692	3,152	3,633
O	IRRIGATION, GAINES	COLORADO	379,779	360,000	341,251	323,477	306,629	292,238
O	LIVESTOCK, GAINES	COLORADO	238	250	262	276	289	304
O	MANUFACTURING, GAINES	COLORADO	2,278	2,386	2,489	2,578	2,722	2,874
O	MINING, GAINES	COLORADO	1,829	2,400	2,071	1,527	1,051	776
O	SEAGRAVES	COLORADO	419	430	447	470	485	502
O	SEMINOLE	COLORADO	2,348	2,571	2,847	3,160	3,411	3,675
Sum of Projected Water Demands (acre-feet)			388,294	369,800	351,572	334,180	317,739	304,002

Projected Water Supply Needs TWDB 2017 State Water Plan Data

Negative values (in red) reflect a projected water supply need, positive values a surplus.

GAINES COUNTY

All values are in acre-feet

RWPG	WUG	WUG Basin	2020	2030	2040	2050	2060	2070
O	COUNTY-OTHER, GAINES	COLORADO	-253	-563	-1,155	-1,492	-1,952	-1,613
O	IRRIGATION, GAINES	COLORADO	-148,524	-193,401	-218,191	-233,497	-242,333	-266,837
O	LIVESTOCK, GAINES	COLORADO	2	0	3	4	1	-146
O	MANUFACTURING, GAINES	COLORADO	-310	-686	-1,007	-1,295	-1,604	-2,380
O	MINING, GAINES	COLORADO	-202	-604	-777	-692	-531	-463
O	SEAGRAVES	COLORADO	1	0	3	0	-15	-32
O	SEMINOLE	COLORADO	-548	-1,071	-1,347	-1,560	-1,611	-1,675
Sum of Projected Water Supply Needs (acre-feet)			-149,837	-196,325	-222,477	-238,536	-248,046	-273,146

Projected Water Management Strategies

TWDB 2017 State Water Plan Data

GAINES COUNTY

WUG, Basin (RWPG)

All values are in acre-feet

Water Management Strategy	Source Name [Origin]	2020	2030	2040	2050	2060	2070
COUNTY-OTHER, GAINES, COLORADO (O)							
GAINES COUNTY-OTHER LOCAL GROUNDWATER DEVELOPMENT	EDWARDS-TRINITY-HIGH PLAINS AQUIFER [GAINES]	600	600	1,500	1,500	2,000	1,622
		600	600	1,500	1,500	2,000	1,622
IRRIGATION, GAINES, COLORADO (O)							
GAINES COUNTY IRRIGATION WATER CONSERVATION	DEMAND REDUCTION [GAINES]	11,563	11,563	12,306	12,306	9,644	9,644
		11,563	11,563	12,306	12,306	9,644	9,644
SEAGRAVES, COLORADO (O)							
GAINES COUNTY - SEAGRAVES LOCAL GROUNDWATER DEVELOPMENT	EDWARDS-TRINITY-HIGH PLAINS AQUIFER [GAINES]	0	0	0	50	50	50
GAINES COUNTY - SEAGRAVES MUNICIPAL WATER CONSERVATION	DEMAND REDUCTION [GAINES]	20	9	0	0	0	0
		20	9	0	50	50	50
SEMINOLE, COLORADO (O)							
GAINES COUNTY - SEMINOLE GROUNDWATER DESALINATION	DOCKUM AQUIFER [GAINES]	500	500	500	500	500	500
GAINES COUNTY - SEMINOLE LOCAL GROUNDWATER DEVELOPMENT	EDWARDS-TRINITY-PLATEAU AQUIFER [ANDREWS]	0	1,000	1,000	1,000	1,000	1,000
GAINES COUNTY - SEMINOLE MUNICIPAL WATER CONSERVATION	DEMAND REDUCTION [GAINES]	117	129	142	158	171	184
		617	1,629	1,642	1,658	1,671	1,684
Sum of Projected Water Management Strategies (acre-feet)		12,800	13,801	15,448	15,514	13,365	13,000

Appendix C

GAM RUN 19-017: LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Andrew Denham and Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
(512) 936-0883
July 19, 2019



Cynthia K. Ridgeway
7/19/19



Shirley C. Wade
7/19/19

Cynthia K. Ridgeway is the Manager of the Groundwater Availability Modeling Department and is responsible for oversight of work performed by Andrew Denham under her direct supervision. The seal appearing on this document was authorized by Cynthia K. Ridgeway, P.G. 471 on July 19, 2019.

This page is intentionally blank.

GAM RUN 19-017: LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Andrew Denham and Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Availability Modeling Department
(512) 936-0883
July 19, 2019

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Llano Estacado Underground Water Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information and this information includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Llano Estacado Underground Water Conservation District should be adopted by the district on or before June 17, 2020 and submitted to the executive administrator of the TWDB on or before July 17, 2020. The current management plan for the Llano Estacado Underground Water Conservation District expires on September 15, 2020.

Information for the Ogallala, Edwards-Trinity (High Plains), and Dockum aquifers located within the Llano Estacado Underground Water Conservation District is from version 1.01 of the groundwater availability model for the High Plains Aquifer System (Deeds and Jigmond, 2015).

This report replaces the results of GAM Run 14-002 (Kohlrenken, 2014), as GAM Run 19-017 includes results from the groundwater availability model for the High Plains Aquifer System (Deeds and Jigmond, 2015), which was released after GAM Run 14-002. Tables 1, 2, and 3 summarize the groundwater availability model data required by statute, and Figures 1, 2, and 3 show the area of the model from which the values in the table were extracted. If, after review of the figures, the Llano Estacado Underground Water Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB immediately.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability model for the High Plains Aquifer System was used to estimate information for the Llano Estacado Underground Water Conservation District groundwater management plan. Water budgets were extracted and averaged for the historical model periods (1980 to 2012) for the Ogallala, Edwards-Trinity (High Plains), and Dockum aquifers. We used ZONEBUDGET Version 3.01 (Harbaugh, 2009) to extract water budgets from the model results. The average annual water budget values for recharge, surface-water outflow, inflow to the district, and outflow from the district for the aquifers within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

High Plains Aquifer System

- We used version 1.01 of the groundwater availability model for the High Plains Aquifer System for this analysis. See Deeds and Jigmond (2015) for assumptions and limitations of the model.
- The model has four layers which represent the Ogallala Aquifer (Layer 1), the Edwards-Trinity (High Plains) Aquifer (Layer 2), and the Dockum Units (Layers 3 and 4). We lumped layers 3 and 4 for calculating water budgets in the Dockum Aquifer within the district.
- Water budgets for the aquifers within the district were averaged over the historical calibration period (1980 to 2012).
- The model was run with MODFLOW-NWT (Niswonger and others, 2011).

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifers according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability model results for the Ogallala, Edwards-Trinity (High Plains), and Dockum aquifers located within Llano Estacado Underground Water Conservation District and averaged over the historical calibration periods, as shown in Tables 1 through 3.

1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface water outflow—the total water discharging from the aquifer (outflow) to surface water features such as streams, reservoirs, and springs.
3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.
4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

The information needed for the district's management plan is summarized in Tables 1

through 3. It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.

TABLE 1. SUMMARIZED INFORMATION FOR THE DOCKUM AQUIFER FOR LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Dockum Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Dockum Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Dockum Aquifer	3
Estimated annual volume of flow out of the district within each aquifer in the district	Dockum Aquifer	8
Estimated net annual volume of flow between each aquifer in the district	From the Dockum Aquifer into other overlying units	1,889
	From the brackish ¹ portions of the Dockum Group into the Dockum Aquifer	15

¹ The Dockum Aquifer extent is delineated where groundwater contains less than 5,000 mg/l total dissolved solids (Ashworth and Hopkins, 1995).

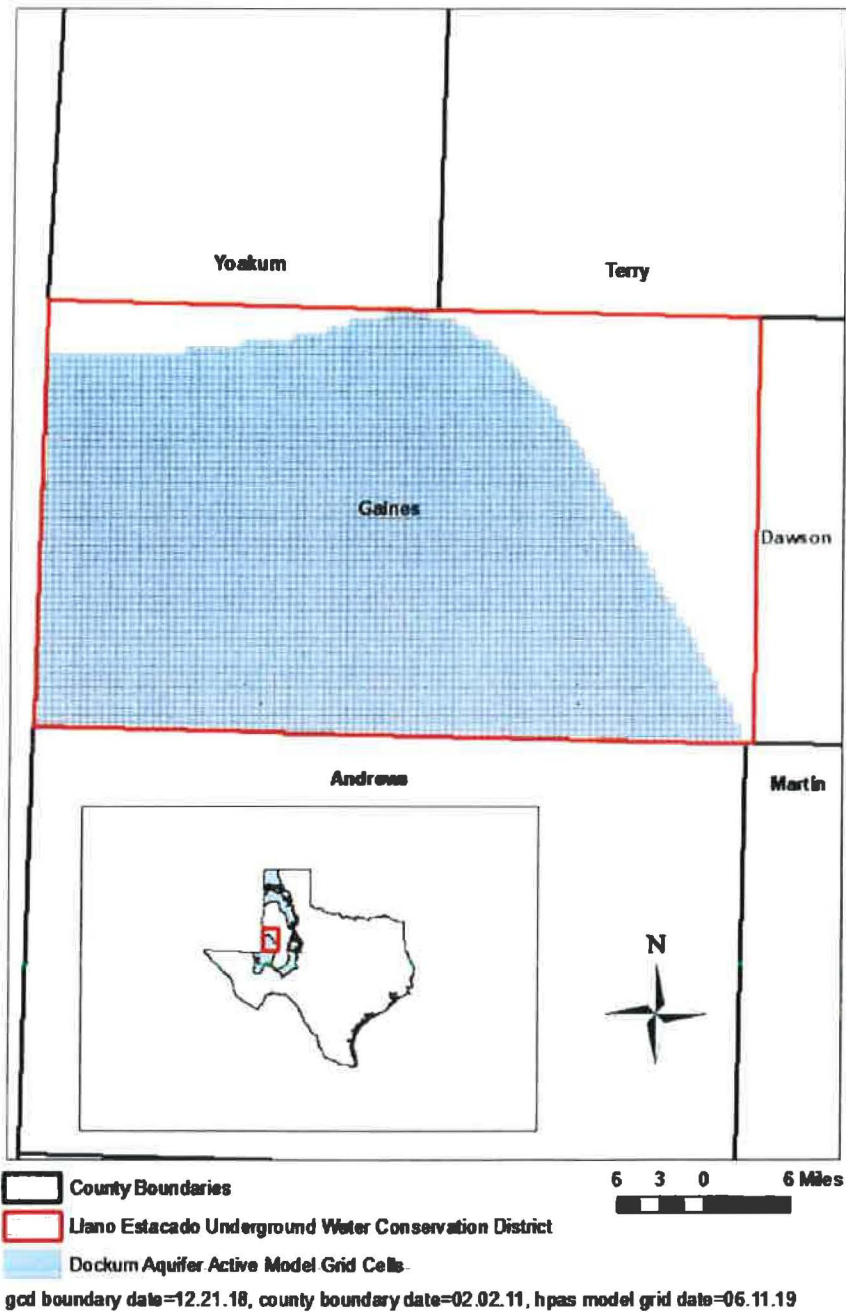


FIGURE 1. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE DOCKUM AQUIFER FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 2. SUMMARIZED INFORMATION FOR THE EDWARDS-TRINITY (HIGH PLAINS) AQUIFER FOR LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Edwards-Trinity (High Plains) Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Edwards-Trinity (High Plains) Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Edwards-Trinity (High Plains) Aquifer	6,524
Estimated annual volume of flow out of the district within each aquifer in the district	Edwards-Trinity (High Plains) Aquifer	389
Estimated net annual volume of flow between each aquifer in the district	From the Ogallala Aquifer into the Edwards-Trinity (High Plains) Aquifer	3,789
	From the Edwards-Trinity (High Plains) Aquifer into the Trinity and Fredericksburg Groups	996

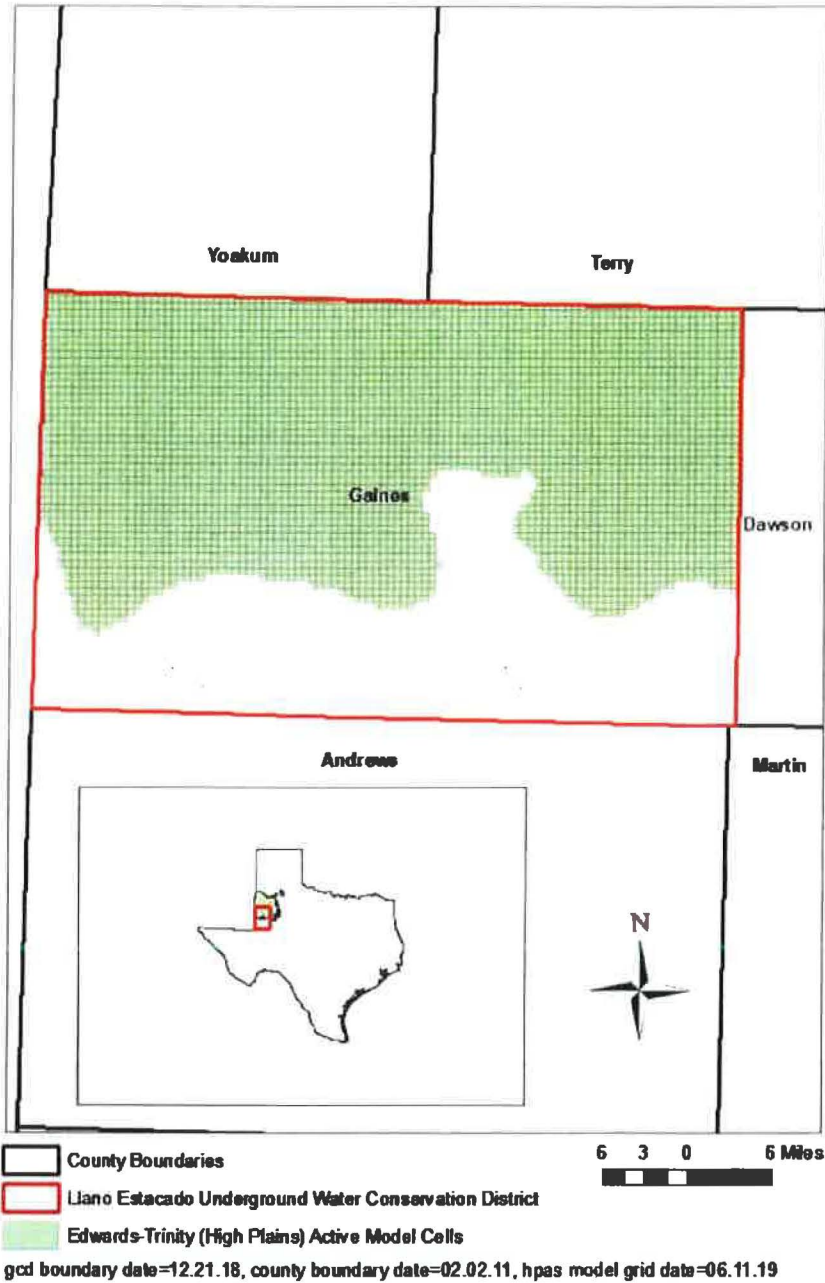


FIGURE 2. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE EDWARDS-TRINITY (HIGH PLAINS) AQUIFER FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 3. SUMMARIZED INFORMATION FOR THE OGALLALA AQUIFER THAT IS NEEDED FOR THE LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE- FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Ogallala Aquifer	64,814
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Ogallala Aquifer	2,304
Estimated annual volume of flow into the district within each aquifer in the district	Ogallala Aquifer	10,299
Estimated annual volume of flow out of the district within each aquifer in the district	Ogallala Aquifer	3,120
Estimated net annual volume of flow between each aquifer in the district	From the Ogallala Aquifer into the Edwards-Trinity (High Plains) Aquifer and other underlying formations	2,174

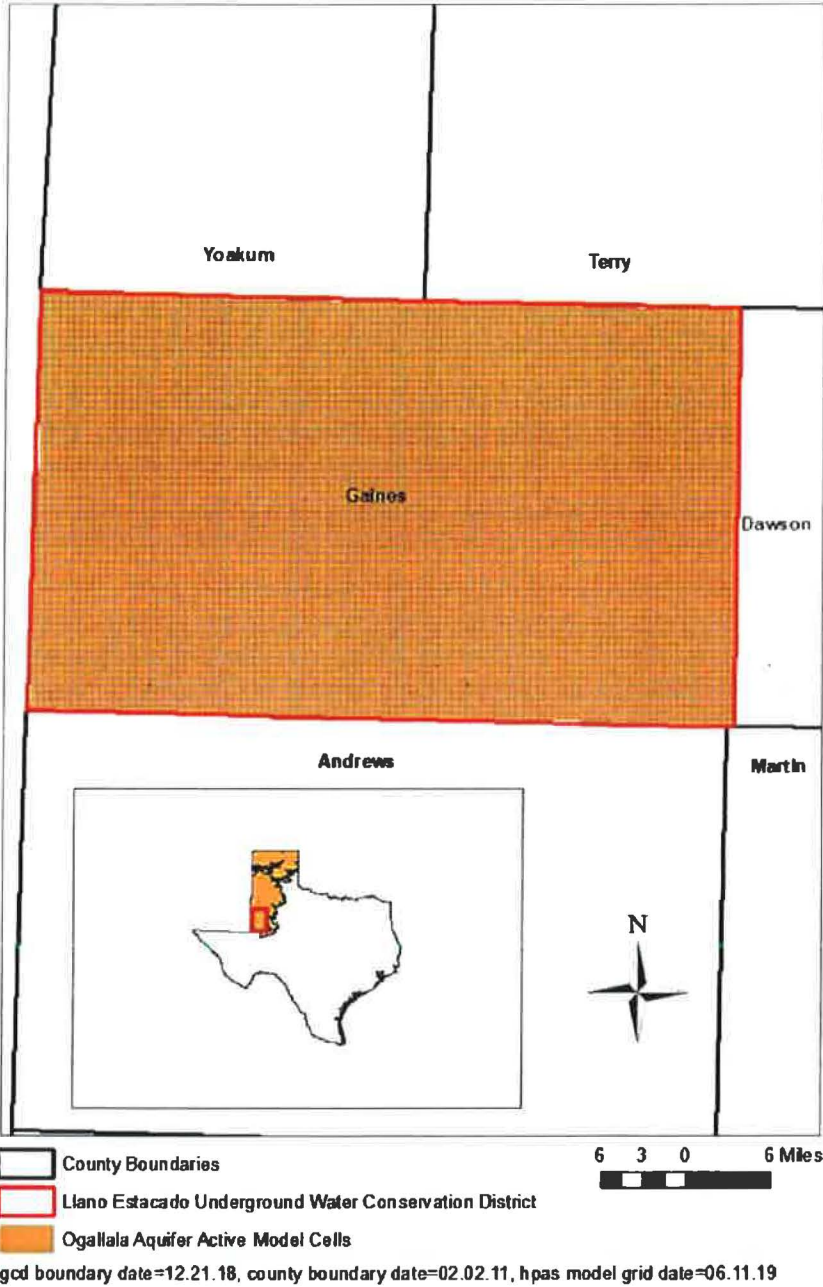


FIGURE 3. AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE OGALLALA AQUIFER FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (THE AQUIFER SYSTEM EXTENT WITHIN THE DISTRICT BOUNDARY).

LIMITATIONS:

The groundwater model used in completing this analysis is the best available scientific tool that can be used to meet the stated objective. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historical groundwater flow conditions includes the assumptions about the location in the aquifer where historical pumping was placed. Understanding the amount and location of historical pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historical time periods.

Because the application of the groundwater model was designed to address regional-scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historical precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

Ashworth, J.B., and Hopkins, J., 1995, Aquifers of Texas: Texas Water Development Report 345, 69 p.

Deeds, N.E., and Jigmond, M., 2015, Numerical model report for the High Plains Aquifer System groundwater availability model, 640 p.,
http://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Numerical_Report.pdf

Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.

Kohlrenken, W., 2014, GAM Run 14-002: Llano Estacado Underground Water Conservation District Management Plan, 14 p.,
<http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR14-002.pdf>

National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.

Niswonger, R. G., Panday, S., and Ibaraki, M., 2011, MODFLOW-NWT, A Newtonian formulation for MODFLOW-2005: U.S. Geological Survey Techniques and Methods 6-A37, 44 p.

Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>

#75

**NOTICE OF MEETING OF THE
GOVERNING BODY OF THE
LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT**

Notice is hereby given that the Board of Directors for the Llano Estacado Underground Water Conservation District will meet in **REGULAR SESSION** on Thursday **October 8, 2020** at 10:00A.M. at, 200 S. E. Ave C., Seminole, Texas. At such time the Board of Directors will discuss and take action on any items on this agenda it determine would be appropriate, to-wit:

AGENDA FOR REGULAR BOARD MEETING

October 8, 2020
10:00 A.M.

1. Call to order
2. Invocation
3. USGS to give virtual presentation
4. Public comment
5. Consider for approval Minutes of September 10, 2020 Regular Board Meeting
6. Consider for approval Amendment of the 2019-2020 Budget
7. Consider for approval Financial Report for period ending September 30, 2020
8. Conduct hearing for LEUWCD 2020-2025 Management Plan
9. Public Forum
10. Close Public Forum
11. Consider for Approval Resolution 20-01 Adopting LEUWCD Management Plan 2020-2025
12. Conduct well permit hearing
13. Public Forum
14. Close Public Forum
15. Consider for approval well permits of October, 2020
16. Consider for approval of Davis, Ray & Co., P.C. Performing Yearly Audit
17. Discussion and possible action Desire Future Conditions
18. The Board may recess into Executive Session regarding Personnel Matter under Texas Civil Statutes, Section 551.074 (a) (1)
19. Monthly Reports
 - a. Paid bills
 - b. Permits
 - c. Non-Refundable Permits
 - d. Region "O" Report(e) Manager Report: (Michelle Cooper, Ray Brady, and Lori Barnes)
20. Any other items pertinent to District Business
21. Adjourn

I, the undersigned authority, do hereby certify that the above **NOTICE OF MEETING** of the Board of Directors of the Llano Estacado Underground Water Conservation District, is a true and correct copy of said Notice, and that I posted a true and correct copy of said Notice on the front entrance of the Llano Estacado Underground Water Conservation District Office, located at 200 S. E. Ave C., Seminole, Texas, and said Notice was posted on this 30th day of September, 2020 at 3:00 p.m., and remained so posted continuously for at least 72 hours immediately preceding the day of said meeting; a true and correct copy of said Notice was furnished to the Gaines County Clerk, in which the above named political subdivision is located.
Dated this the 30th day of September, 2020



Llano Estacado Underground
Water Conservation District

by: Mastie McFarland

I, the undersigned County Clerk, do hereby certify that the **NOTICE OF MEETING** of the Llano Estacado Underground Water Conservation District is a true and correct copy of said Notice received by me on the 30th day of September, 2020 at 3:00 p.m., and that I posted the true and correct copy of said Notice on the bulletin board in the Gaines County Courthouse, on the 30th day of September, 2020 and said Notice remained so posted continuously for at least 72 hours immediately preceding the day of said Meeting.

Dated this the 30th day of September

Terry Berry, County Clerk,
Gaines County, Texas

Terry Berry

FILED
930200 3:00 p m
Terri Berry, County Clerk
Gaines County, Texas
BY Deputy
Deputy

#15

35 09 14 44
LLANO ESTACADO
OWCD
200 SE AVENUE C
SEMINOLE TX 79360-4444

Seminole Sentinel

\$1 Wednesday, September 30, 2020

www.seminolesentinel.com



Tribe Coifers Compete
in Lubbock
See Page 6

OBITUARIES - See Pg. 2
Mary Aline (Hobbs) Dearman

SEDC Considers
Downtown Art Project



Indians Go for Second
Victory at Monahans



Notice of Public Hearing

Llano Estacado Underground Water Conservation District, located in Seminole, Texas, will hold a public hearing on Thursday, October 8, 2020, at 10:00 a.m. to consider the adoption of a local Management Plan. Copies of the proposed local Management Plan may be obtained from Llano Estacado Underground Water Conservation District's office located at 200 SE Ave C, Seminole, Texas.

LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT

200 SE Ave C, Seminole, TX 79360 * 432-758-1127

Resolution 20-01

Management Plan 2020-2025

WHEREAS, the Llano Estacado Underground Water Conservation District (the District) was created on May 24, 1991, by authority of HB 530 of the 72nd Texas legislature; and

WHEREAS, the registered voters of the District confirmed the District's creation in November, 1998; and

WHEREAS, the District adopted a Management Plan effective July 15, 2010 as required by SB 1, 75th Texas Legislature; and

WHEREAS, the current Management Plan is required by Chapter 36.1072, Texas Water Code, to be renewed every five years; and

WHEREAS, the Board of Directors of the District has determined that a revision of the existing Management Plan is warranted; and

WHEREAS, the Board of Directors of the District has determined that the revised Management Plan adequately addresses the requirements of Chapter 36.1071, Texas Water Code; and

WHEREAS, the revised Management Plan shall become effective on October 8, 2020, upon adoption by the Board of Directors of the District and shall remain the effect until October 8, 2025, or until a revised Plan is adopted, whichever occurs first, therefore be it

RESOLVED, that the Board of Directors of the Llano Estacado Underground Water Conservation District hereby adopts the revised Management Plan; and further

RESOLVE that this revised Management Plan shall become effective on October 8, 2020.

**Adopted this 8th day of October 2020, by the Board of Directors of the Llano Estacado
Underground Water Conservation District.**


Weldon Shook, President


Charles Rowland, Vice-President


Walter Billings, Secretary


Larry Day, Member


Rob Warren, Member

STATE OF TEXAS
COUNTY OF GAINES

This instrument was acknowledged before me on the 8th day of October 2020.




Notary Public, State of Texas


Notary's Name Printed:

#75

**NOTICE OF MEETING OF THE
GOVERNING BODY OF THE
LLANO ESTACADO UNDERGROUND WATER CONSERVATION DISTRICT**

Notice is hereby given that the Board of Directors for the Llano Estacado Underground Water Conservation District will meet in **REGULAR SESSION** on Thursday **October 8, 2020** at 10:00A.M. at, 200 S. E. Ave C., Seminole, Texas. At such time the Board of Directors will discuss and take action on any items on this agenda it determine would be appropriate, to-wit:

**AGENDA FOR REGULAR BOARD MEETING
October 8, 2020
10:00 A.M.**

1. Call to order
2. Invocation
3. USGS to give virtual presentation
4. Public comment
5. Consider for approval Minutes of September 10, 2020 Regular Board Meeting
6. Consider for approval Amendment of the 2019-2020 Budget
7. Consider for approval Financial Report for period ending September 30, 2020
8. Conduct hearing for LEUWCD 2020-2025 Management Plan
9. Public Forum
10. Close Public Forum
11. Consider for Approval Resolution 20-01 Adopting LEUWCD Management Plan 2020-2025
12. Conduct well permit hearing
13. Public Forum
14. Close Public Forum
15. Consider for approval well permits of October, 2020
16. Consider for approval of Davis, Ray & Co., P.C. Performing Yearly Audit
17. Discussion and possible action Desire Future Conditions
18. The Board may recess into Executive Session regarding Personnel Matter under Texas Civil Statutes, Section 551.074 (a) (1)
19. Monthly Reports
 - a. Paid bills
 - b. Permits
 - c. Non-Refundable Permits
 - d. Region "O" Report
 - (e) Manager Report: (Michelle Cooper, Ray Brady, and Lori Barnes)

I, the undersigned authority, do hereby certify that the above **NOTICE OF MEETING** of the Board of Directors of the Llano Estacado Underground Water Conservation District, is a true and correct copy of said Notice, and that I posted a true and correct copy of said Notice on the front entrance of the Llano Estacado Underground Water Conservation District Office, located at 200 S. E. Ave C., Seminole, Texas, and said Notice was posted on this 30th day of September, 2020 at 3:00 p.m., and remained so posted continuously for at least 72 hours immediately preceding the day of said meeting; a true and correct copy of said Notice was furnished to the Gaines County Clerk, in which the above named political subdivision is located.
Dated this the 30th day of September, 2020



Llano Estacado Underground
Water Conservation District

by: Marie Neusel

I, the undersigned County Clerk, do hereby certify that the **NOTICE OF MEETING** of the Llano Estacado Underground Water Conservation District is a true and correct copy of said Notice received by me on the 30th day of September, 2020 at 3:00 p.m., and that I posted the true and correct copy of said Notice on the bulletin board in the Gaines County Courthouse, on the 30th day of September, 2020 and said Notice remained so posted continuously for at least 72 hours immediately preceding the day of said Meeting.

Dated this the 30th day of September

Terry Berry, County Clerk,
Gaines County, Texas

Jeri Berry

